


D

C

B

A

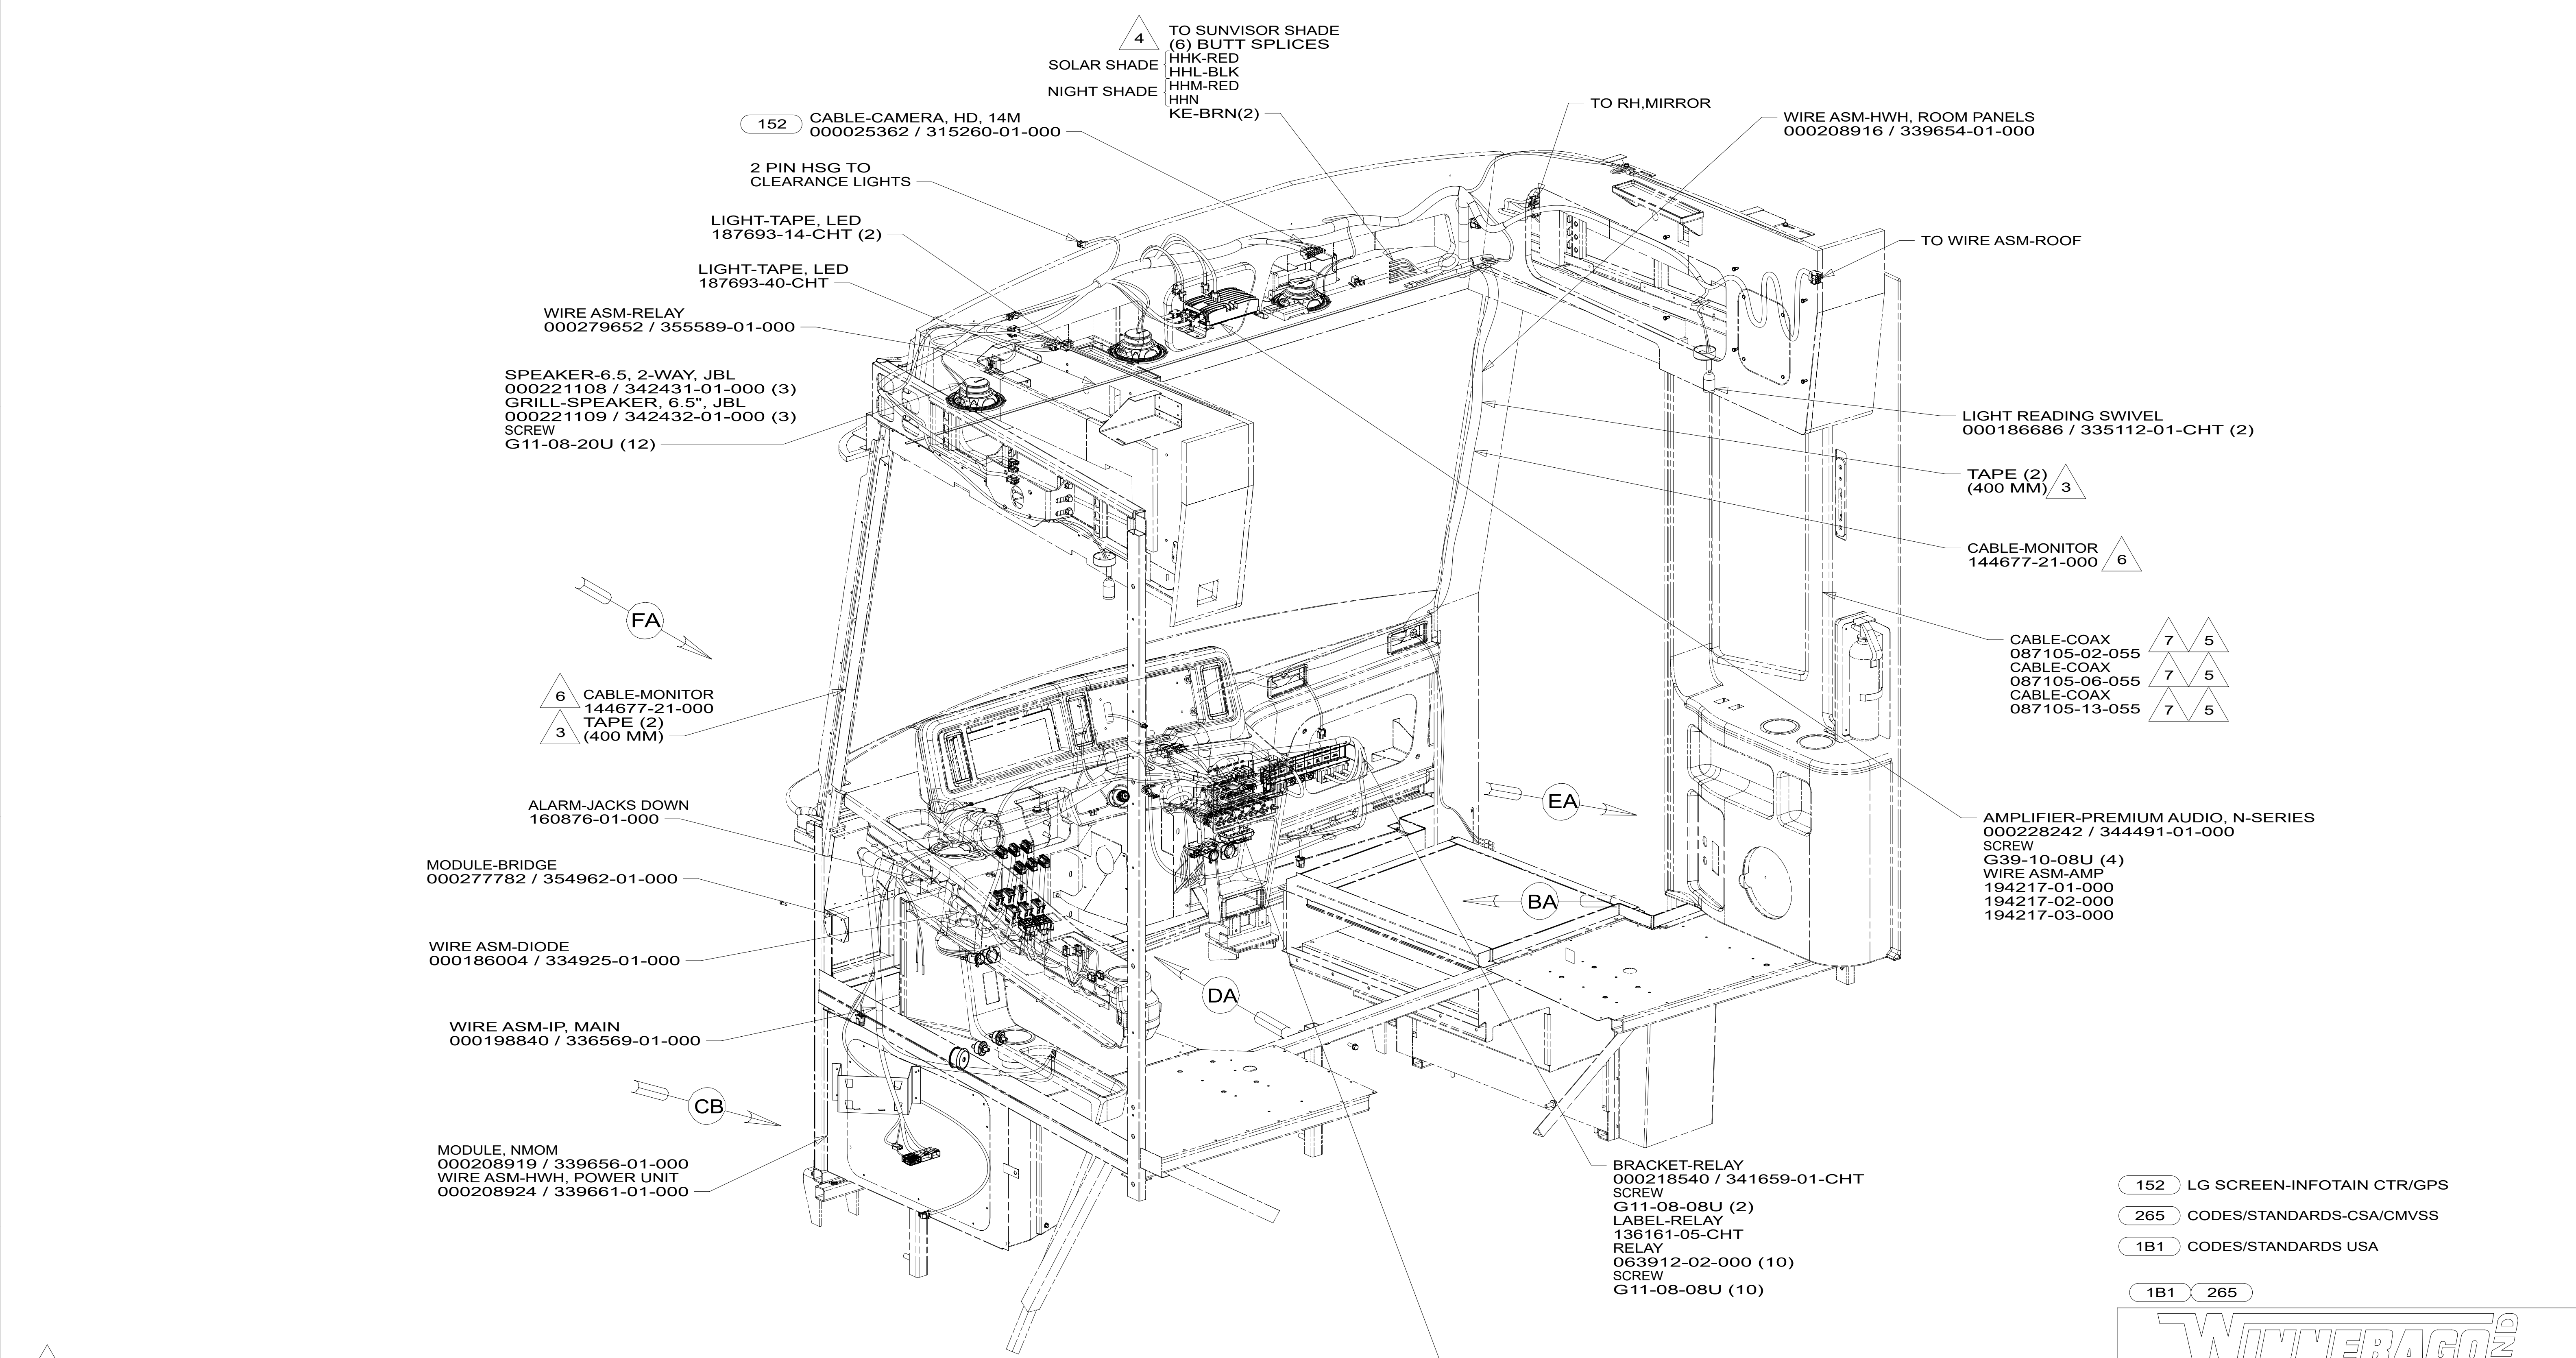

- 7 CONNECT TO ROOF HARNESS WITH ADAPTER-CABLE 82134-01-000.
- 6 ROUTE CABLE TO EXTERIOR MIRRORS. CAMERA IS IN MIRROR.
- 5 ROUTE DOWN B-PILLAR AND THROUGH TROUGH TO AV CAB.
- 4 CUT VISOR WIRING TO 300MM BEFORE CONNECTING.
- 3 USE TAPE 008363-03-000 TO SECURE WIRES IN A-POST.

- 2. USE TRIM-EDGE,C-TYPE 093305-01-CHT TO PROTECT WIRES FROM SHARP EDGES.
- 1. SEE WIRING INSTL-CHASSIS FOR ADDITIONAL INFORMATION.

NOTES:

CC	INDICATES A CRITICAL CHARACTERISTIC. ENSURE PROPER PROCEDURES ARE FOLLOWED.
SC	INDICATES A SIGNIFICANT CHARACTERISTIC. ENSURE PROPER PROCEDURES ARE FOLLOWED.
KC	INDICATES A KEY CHARACTERISTIC. ENSURE PROPER PROCEDURES ARE FOLLOWED.

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG 000228177 344479-01-000

- 152 LG SCREEN-INFOTAIN CTR/GPS
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

WINNEBAGO
COPYRIGHT 2024 WINNEBAGO INDUSTRIES, INC.

DSNR:	ALL DIMENSIONS ARE IN MILLIMETERS	
DFT:	MATERIAL:	
UNSPECIFIED TOLERANCES:	WHOLE DIM (X) :	3
ONE-PLACE (X.X) :	TWO-PLACE (X.XX) :	0.50
ANGLE :		1°
REFER TO ES0018 FOR FASTENER TIGHTENING GUIDELINES	WEIGHT: (LBS)	FIRST USED:
		21 N-SER
DESCRIPTION:		
WIRING INSTL-FRONT END		
SHEET:	ITEM/PART NO.:	REV:
1 OF 10	000185992 / 33497201000	
REF:		1 28-Mar-2024

WIRE ASM-IP,MAIN

LABEL-CB PREP OPTION
104678-01-000

CB POWER PROVISION
YELLOW +12V
WHITE GROUND
COAX ANTENNA
(SEE REVERSE SIDE ALSO)

WHT YEL
TO CUSTOMERS
CB RADIO

DETAIL BB 579

TO LEVELING SYSTEM
WIRE ASM-DIODE
000186004 / 334925-01-000 (2)

SPADE TERMINALS
TO USB CHARGER
AND 12V RCP

TO SWITCHES
DETAIL DA

(2) BUTT SPLICES
TO CB PREP
DETAIL BB

RING TERMINALS
TO GROUND STUD
TORQUE TO 17.8 NM ± 1.8 NM


TO JACKS DOWN ALARM

TO WIRE ASM-RADIO
DETAIL JA

2 & 6 PIN HOUSINGS
TO HEATER/AC CONTROLS

PLATE-SWITCH TOGGLE
000205001 / 338532-01-CHT
REINFORCEMENT-SW PLATE,CTR CONSOLE
000206128 / 338917-01-CHT
CLAMP-SW PLATE,CTR CONSOLE
000206198 / 338919-01-CHT
SWITCH-TOGGLE,ON/ON
000206607 / 339038-01-CHT
SWITCH-TOGGLE,(ON)/OFF
000200677 / 337402-01-CHT (5)

WIRE ASM-SWITCHES
000242241 / 346961-01-000

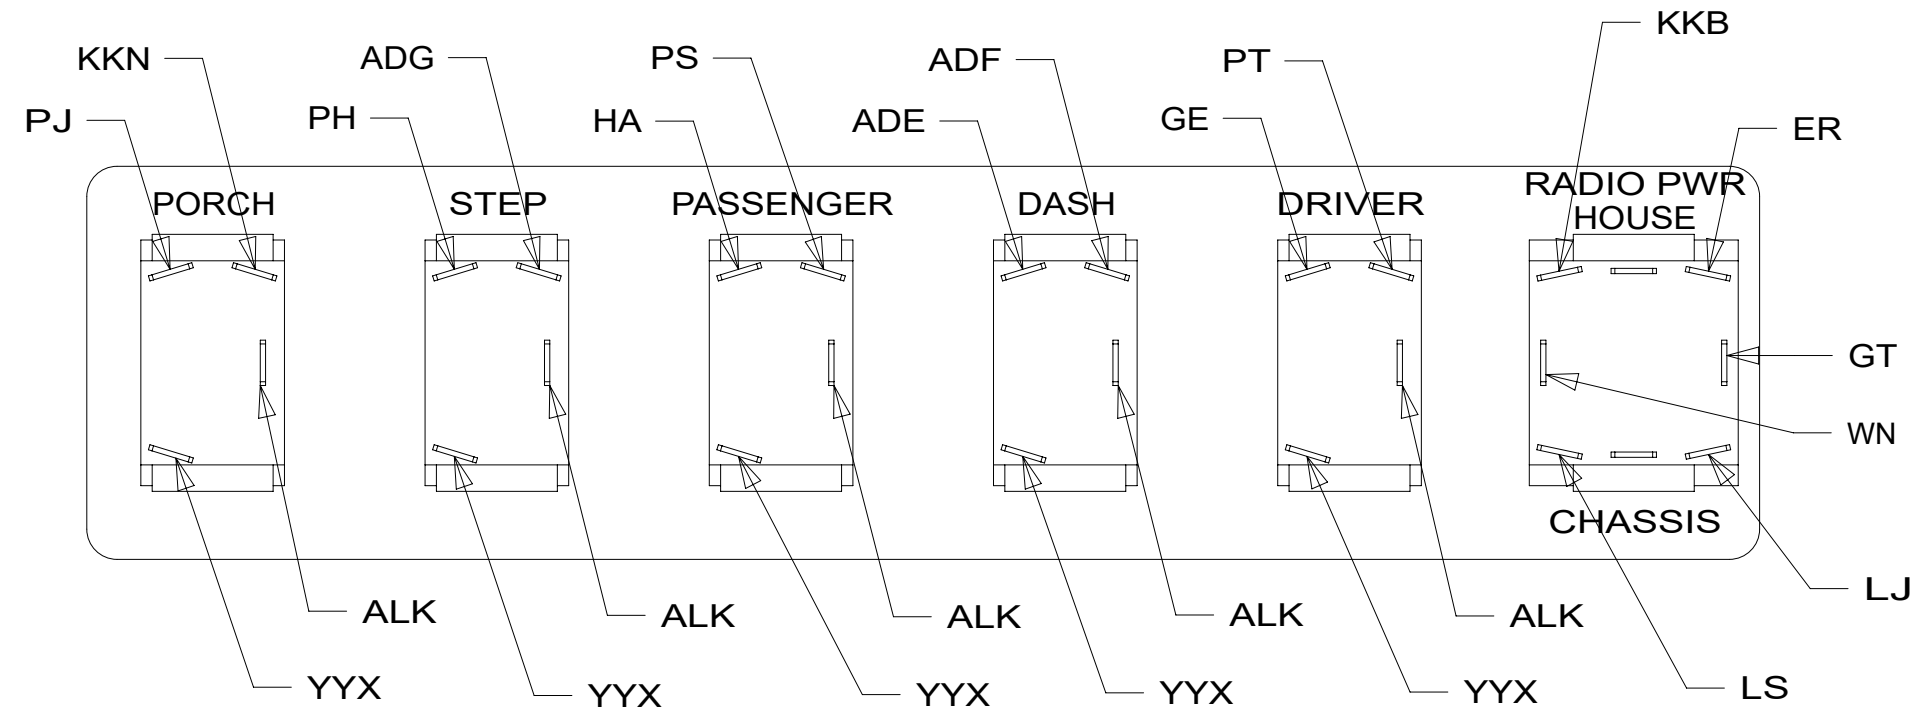

VIEW BC

VIEW BA

1 EDGE OF LABEL TO HANG JUST BELOW BOTTOM OF DASH.

NOTES:


FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

FOR
ELECTRICAL
CALLOUTS SEE
DWG 000228177
344479-01-000


- 579 RADIO - CB WIRE PREP
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

DESCRIPTION:		1B1 265
WIRING INSTL-FRONT END		
SHEET:	ITEM/PART NO:	REV:
2 OF 10	000185992 / 33497201000	


8 7 6 5 4 3 2 1

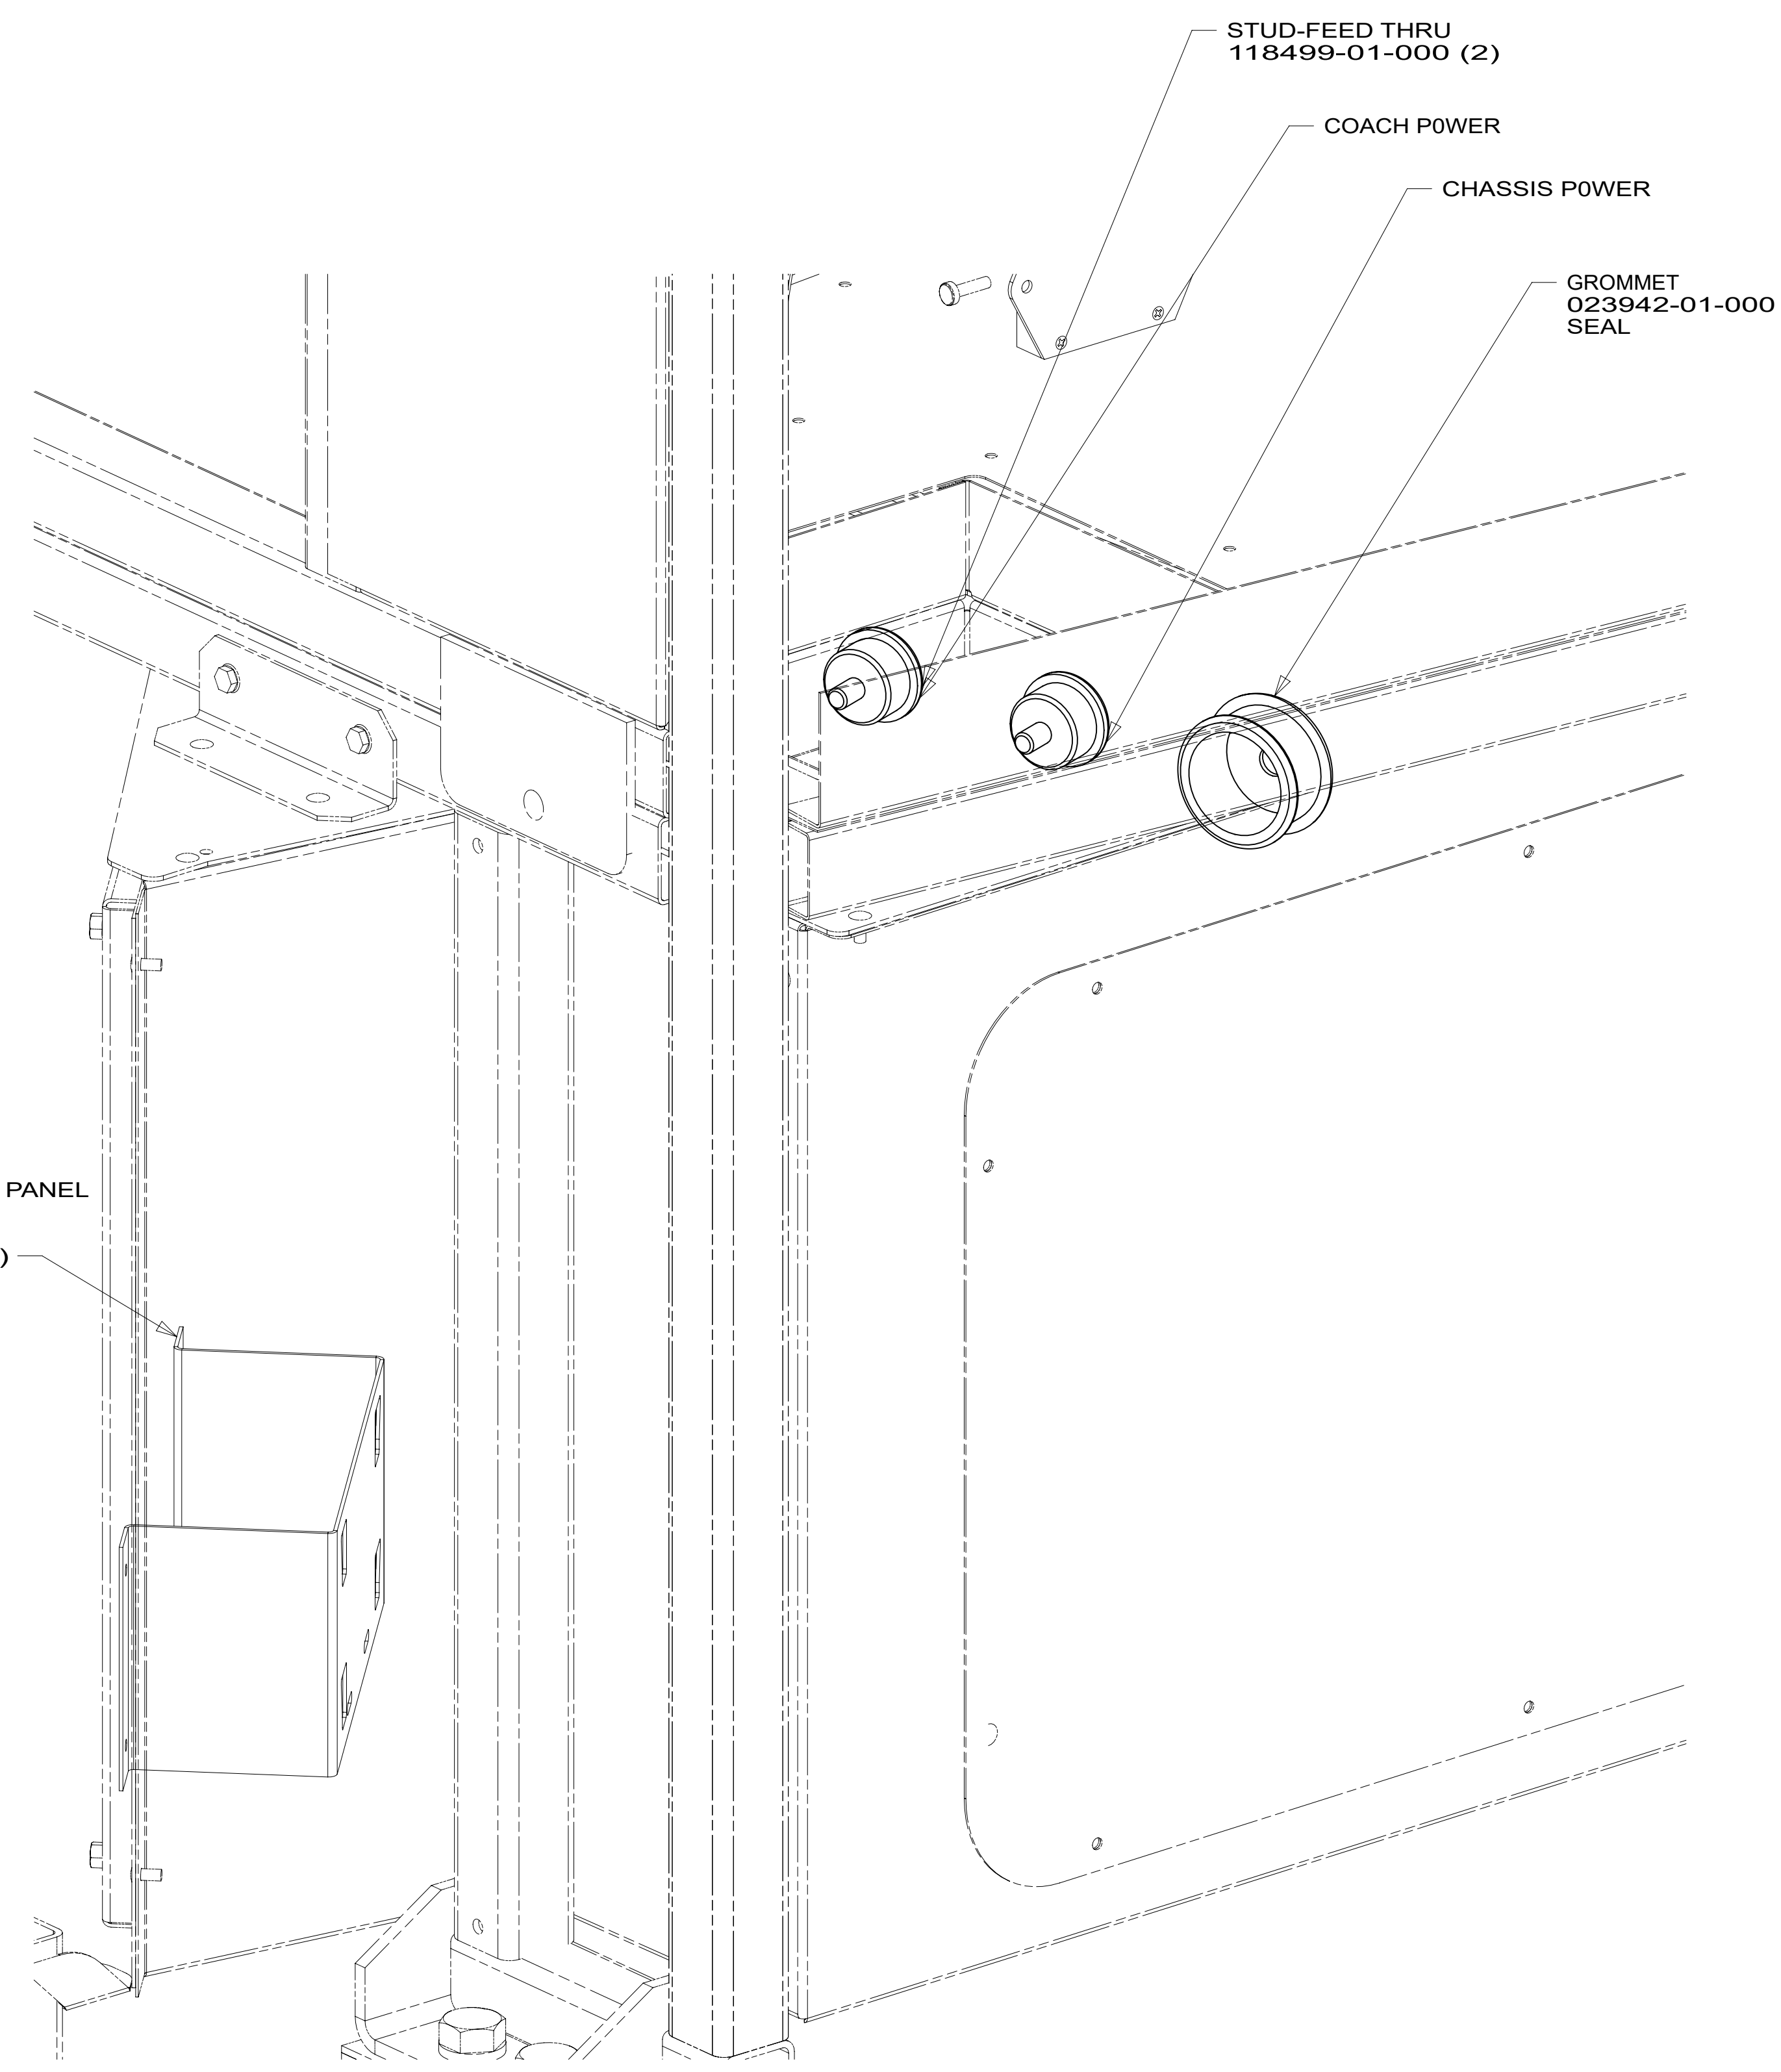

VIEW CB \triangle 2

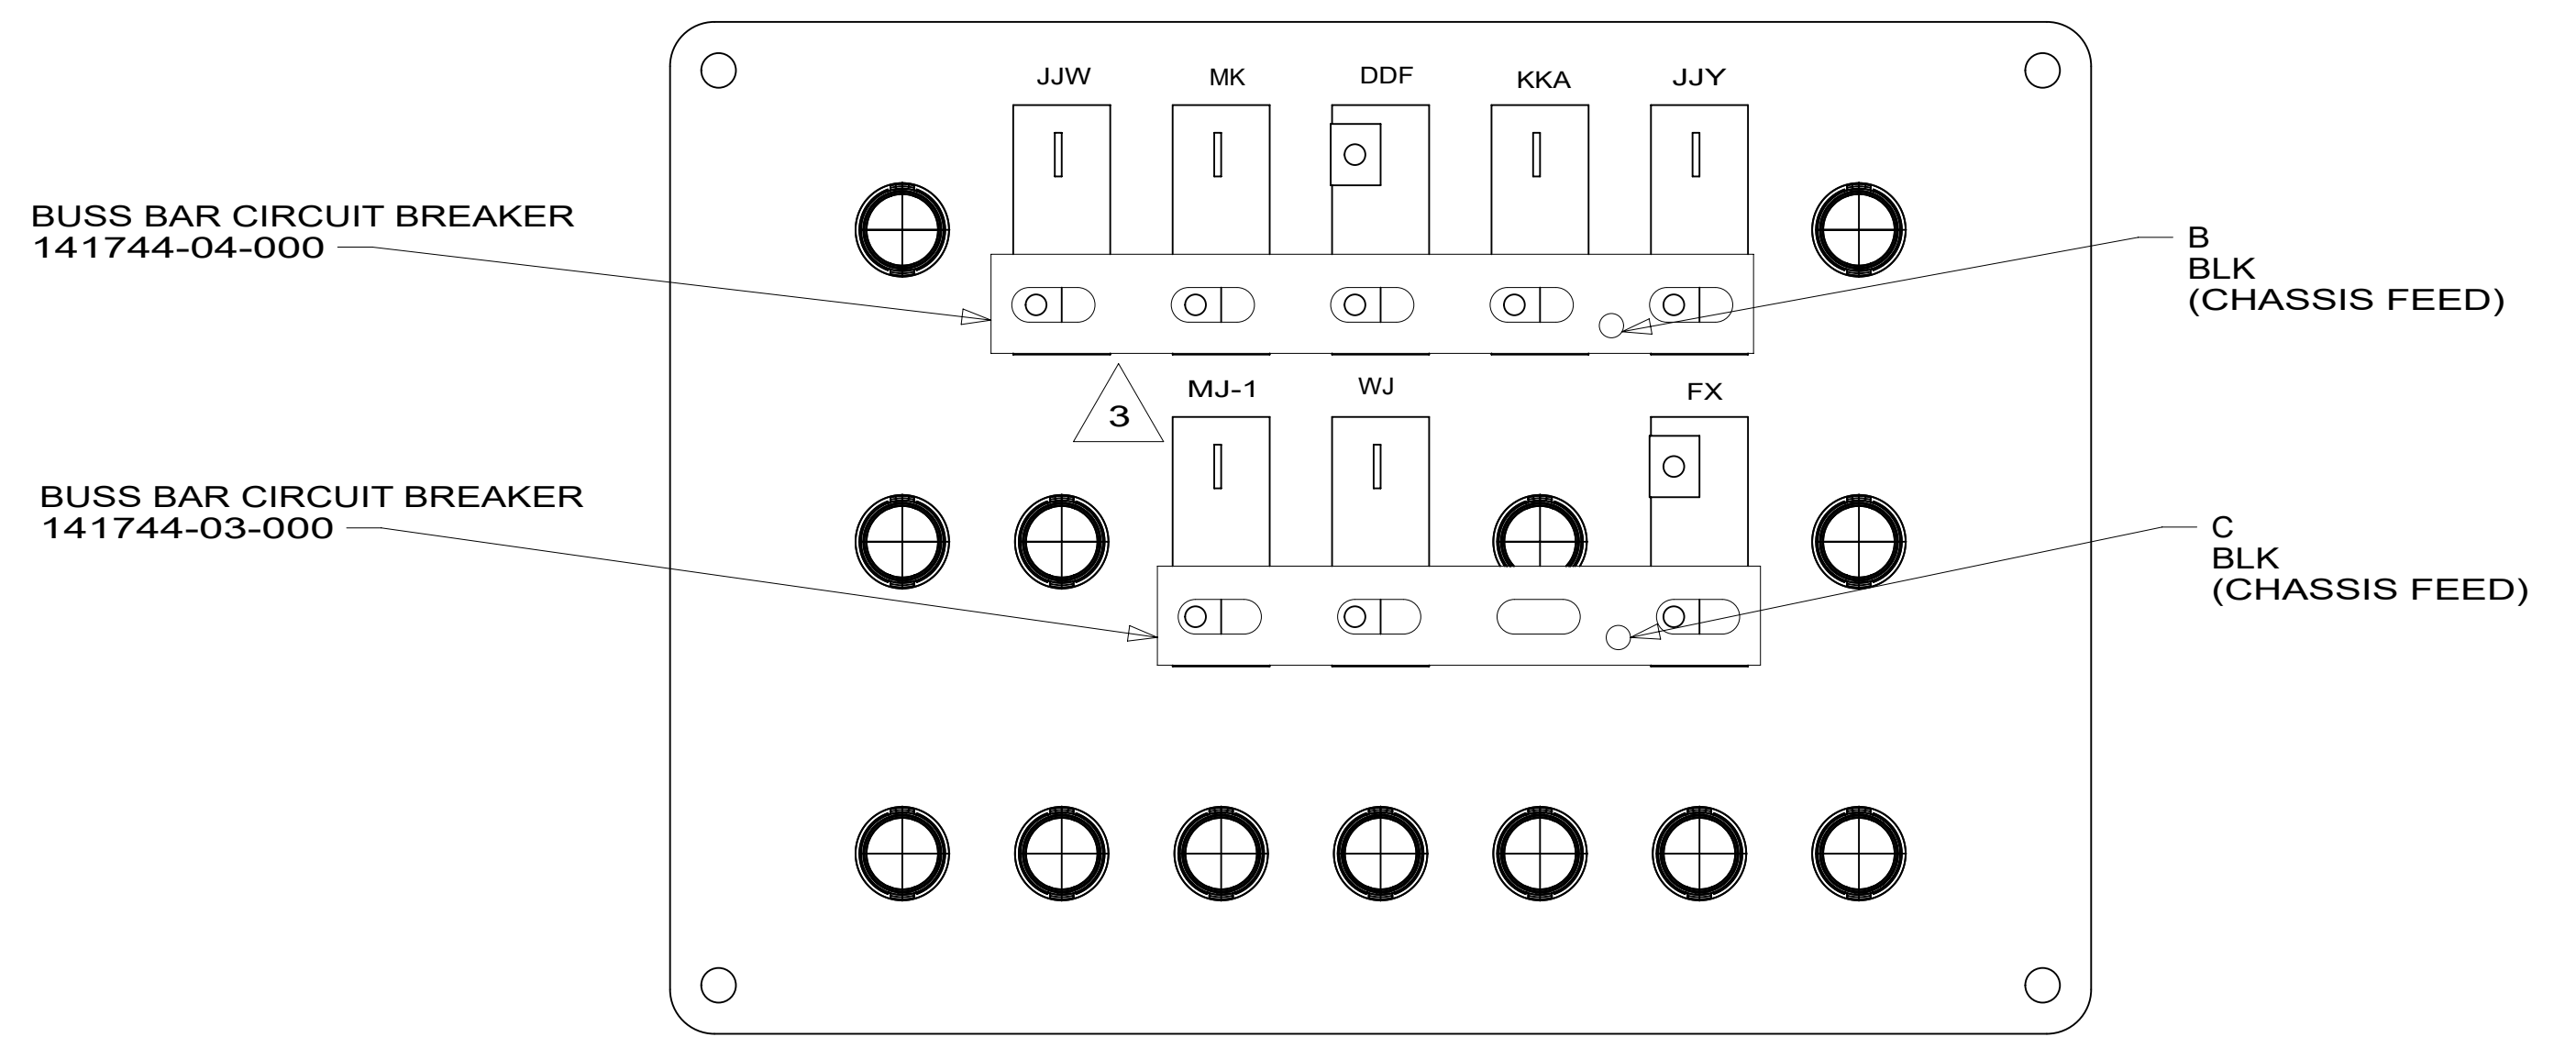

DETAIL CA \triangle 1 (BACK VIEW)

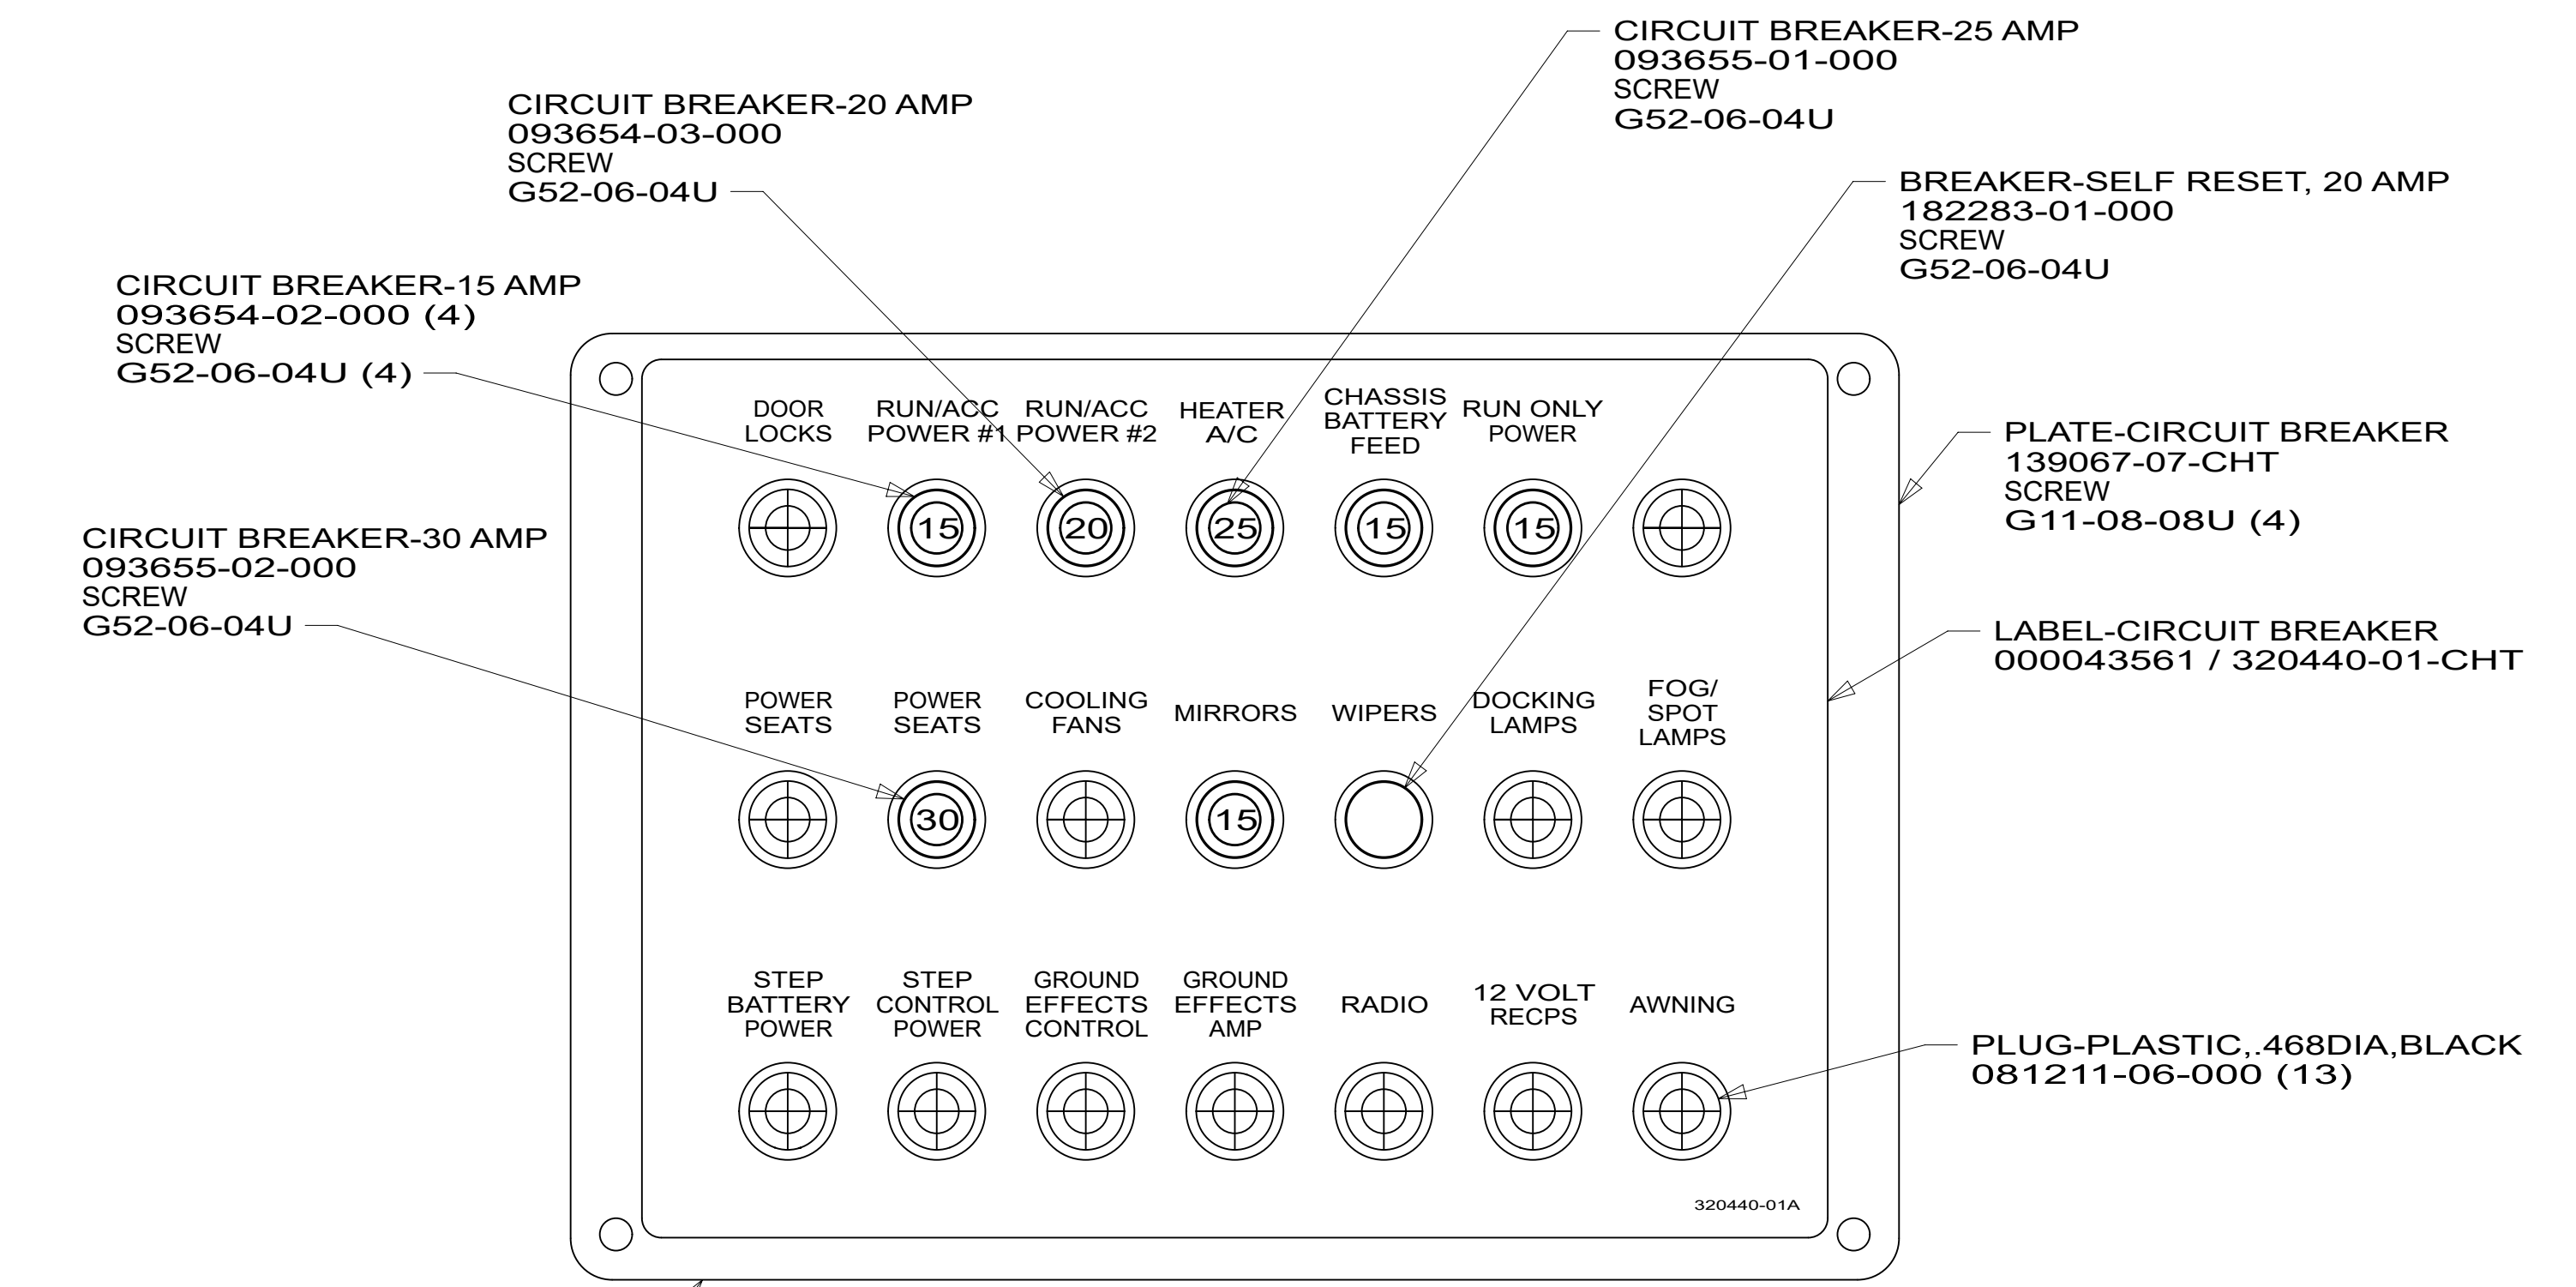

DETAIL CA (FRONT VIEW)

- NOTES:
- \triangle 3 CIRCUIT FROM WIRE ASM-WIPER WASHER.
 - \triangle 2 SEAL ALL SCREWS ON EXTERIOR SIDE OF COMPARTMENT. REFER TO SEALANT MANUAL.
 - \triangle 1 CIRCUITS LABELED ON BREAKER ARE FROM WIRE ASM-IP,MAIN UNLESS OTHERWISE SPECIFIED.


- \square 265 CODES/STANDARDS-CSA/CMVSS
- \square 1B1 CODES/STANDARDS USA

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG 000228177 344479-01-000

DESCRIPTION:	
WIRING INSTL-FRONT END	
SHEET:	ITEM/PART NO.:
3 OF 10	000185992 / 33497201000
REV	
	1 28-Mar-2024

8 7 6 5 4 3 2 1

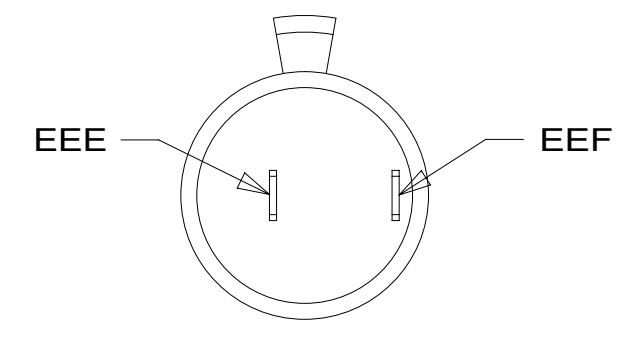

DETAIL DB

PARKING BRAKE
(CHASSIS SUPPLIED)

SWITCH-GENERATOR
000201256 / 337389-01-CHT

SWITCH-BATTERY BOOST
000201251 / 337388-01-CHT

SWITCH-MIRROR HEAT
000201860 / 337395-01-CHT

SWITCH-DAY SHADE
000200668 / 337384-01-CHT

SWITCH-AIR HORN
000201250 / 337386-01-CHT

SWITCH ASM-MIRROR,REMOTE
088246-01-000 (2)

RECEPTACLE-12V
111414-01-000
DETAIL DB

SWITCH-NIGHT SHADE
000201241 / 337385-01-CHT

ATC OVERRIDE SWITCH
(CHASSIS SUPPLIED)

USB CHARGER-DUAL,DC
188312-01-000
DETAIL DB

SWITCH-IGNITION,KEYONE
185422-01-000

RADIO-INFOTAINMENT, 12.3"
000200845 / 337397-01-000

LABEL-JACKS DOWN
133533-01-CHT

LIGHT-JACKS DOWN
190682-01-000

RECEPTACLE-12V
111414-01-000
DETAIL DB

USB CHARGER-DUAL,DC
188312-01-000
DETAIL DB

VIEW DA

2 MOUNT SWITCH SO WHEN ACTUATOR IS PUSHED LEFT,
THE LETTER L IS SHOWING.

1. APPLY TAPE 8363-01-000 AS NECESSARY
TO SECURE NON-LOCKING CONNECTIONS.

NOTES:

265 CODES/STANDARDS-CSA/CMVSS

1B1 CODES/STANDARDS USA

1B1 265

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

FOR ELECTRICAL
CALLOUTS SEE
DWG 000228177
344479-01-000

DESCRIPTION:
WIRING INSTL-FRONT END

SHEET: 4 OF 10 ITEM/PART NO.: 000185992 / 33497201000 REV:

1 28-Mar-2024

8

7

6

5

4

3

2

1

SWITCH-STEP COVER
000201276 / 337393-01-CHT

SWITCH-ENTRY LOCK
000201859 / 337394-01-CHT

USB-CHARGER DUAL,DC
188312-01-000
DETAIL DB

RECEPTACLE
111414-01-000
DETAIL DB

SPEAKER-8 SUBWOOFER, JBL
193633-01-000
SCREW
G11-08-08U (4)
PIGTAIL-SUBWOOFER
193633-04-000
GRILL-SPEAKER, 8, JBL
193633-02-000
PLATE-SPEAKER
194221-01-000 (2)
SCREW
G11-08-08U (8)
SEAL
185989-07-000
(360MM) (2)
SCREW
G11-10-12U (4)

VIEW EA

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

FOR
ELECTRICAL
CALLOUTS SEE
DWG 000228177
344479-01-000

265 CODES/STANDARDS-CSA/CMVSS

1B1 CODES/STANDARDS USA

1B1 265

DESCRIPTION:
WIRING INSTL-FRONT END

SHEET: 5 OF 10 ITEM/PART NO: 000185992 / 33497201000 REV

8

7

6


5

4

3

2

1 28-Mar-2024

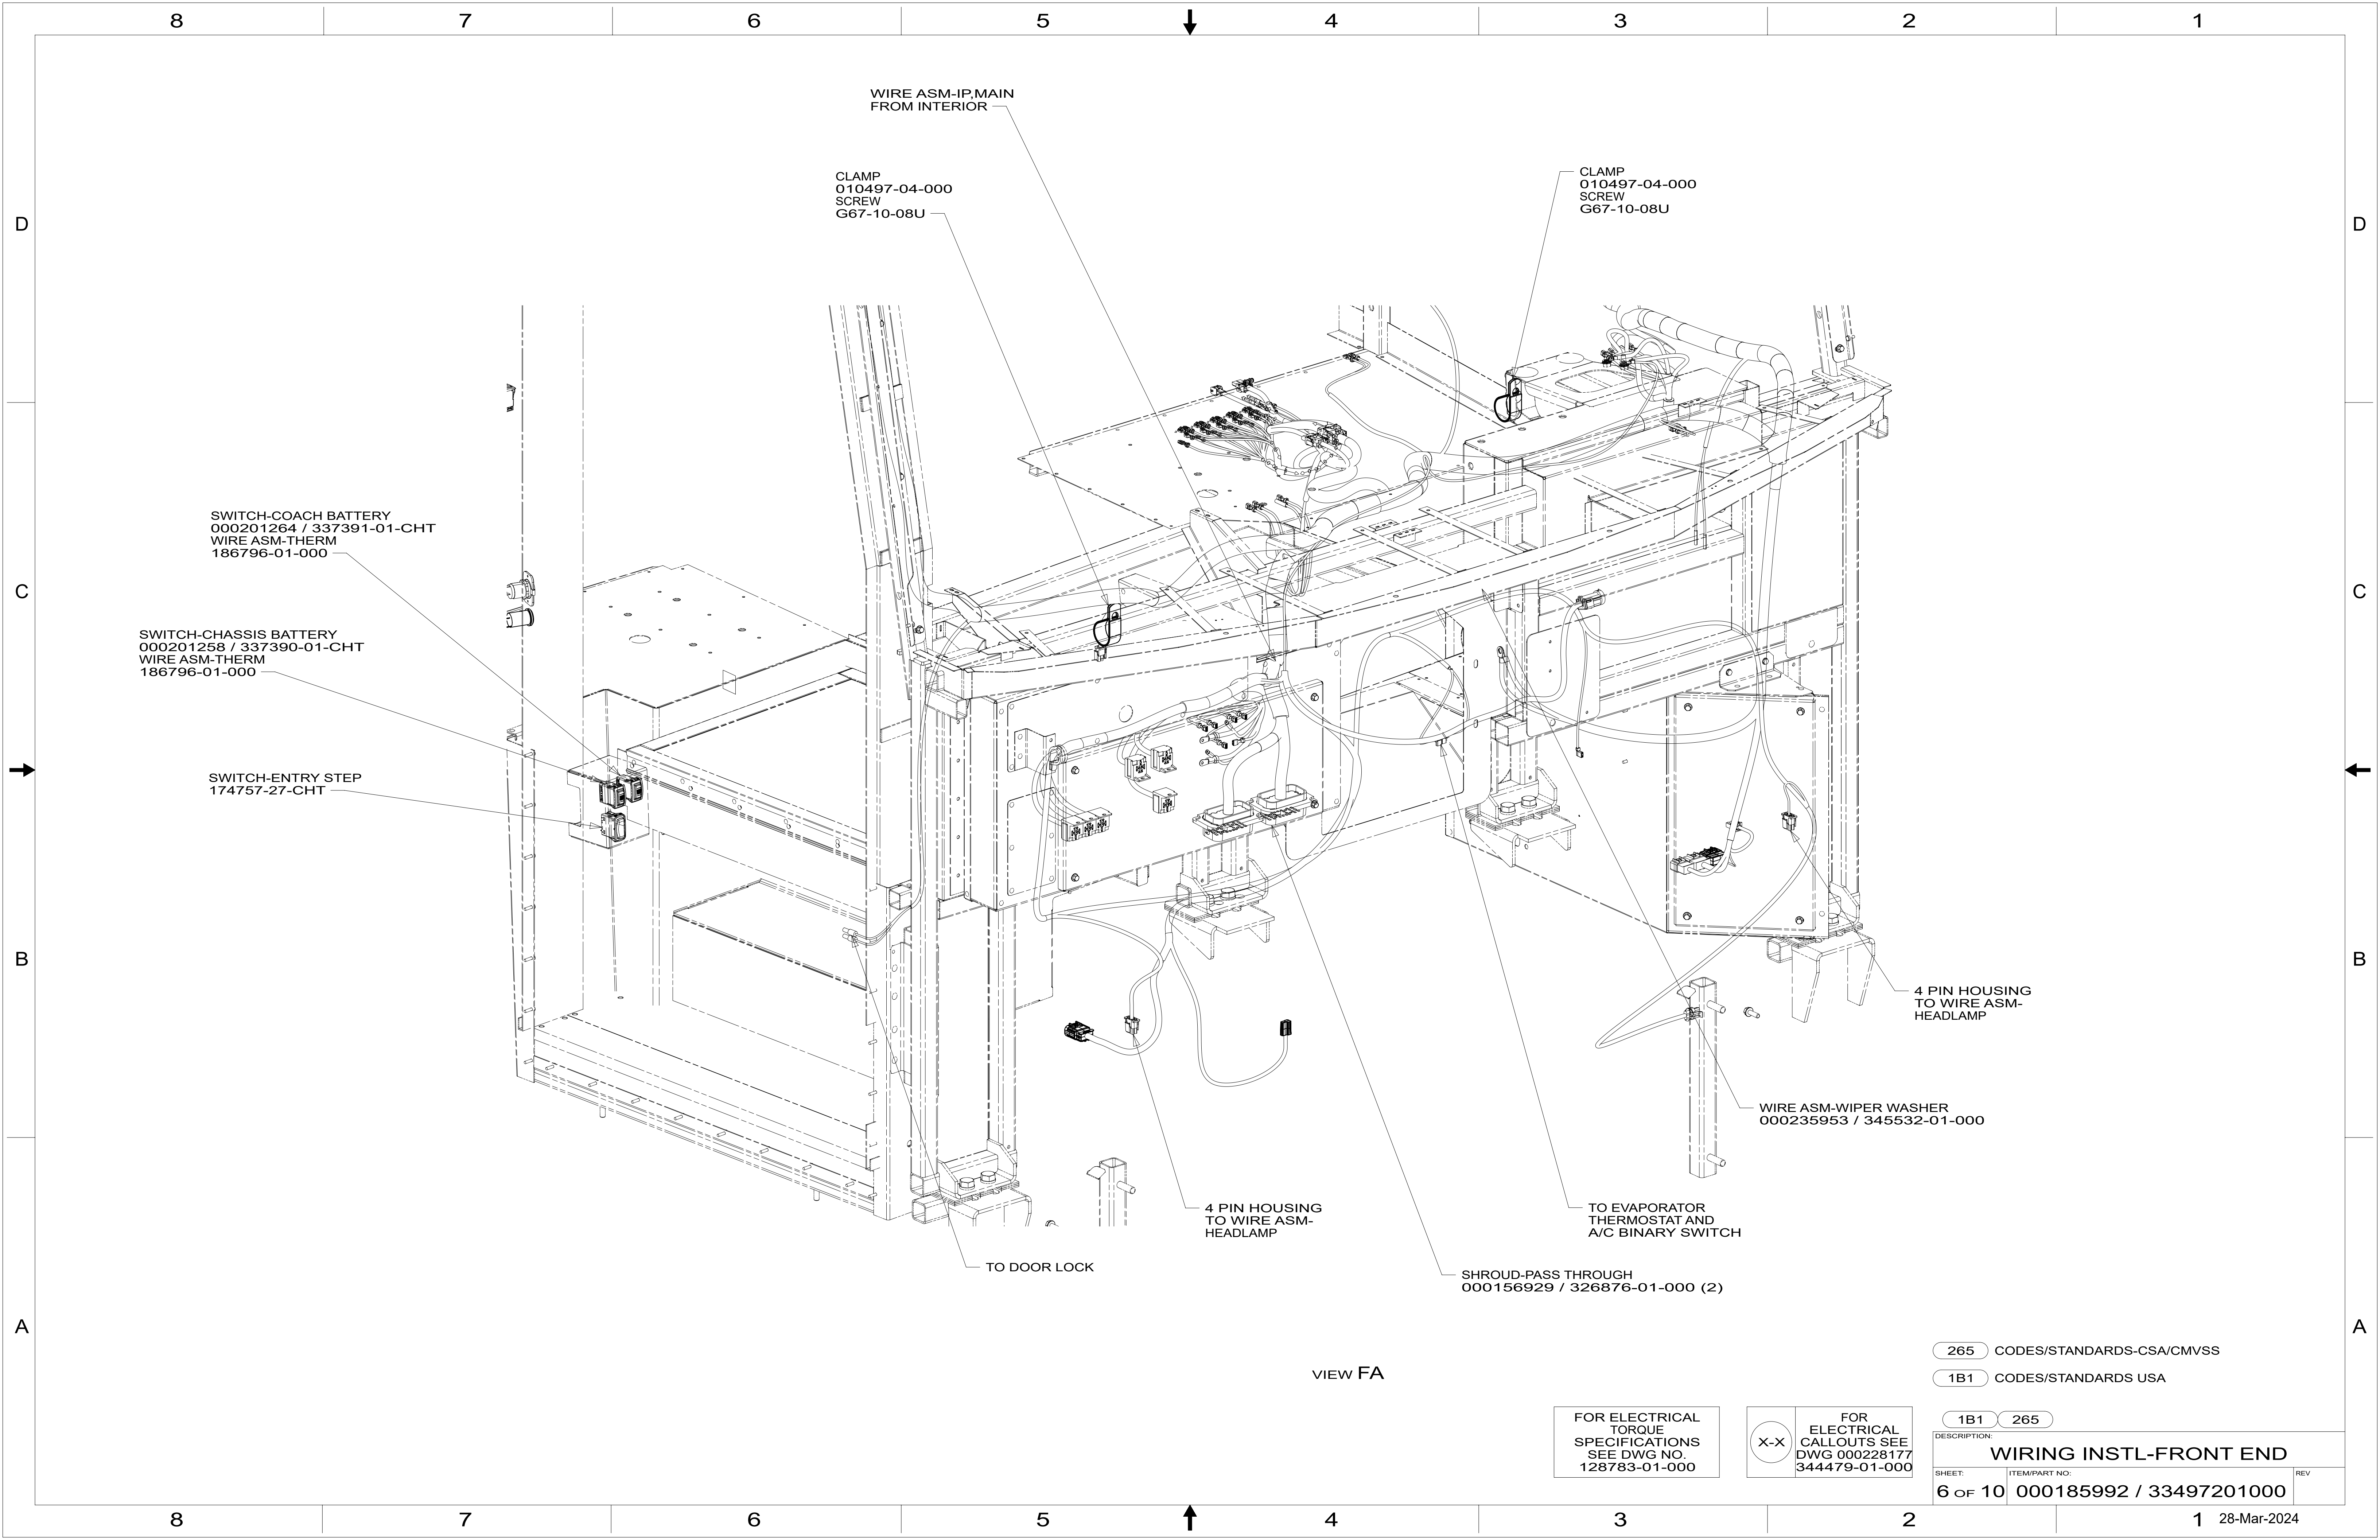

VIEW FA

265 CODES/STANDARDS-CSA/CMVSS

1B1 CODES/STANDARDS USA

1B1 265

DESCRIPTION:
WIRING INSTL-FRONT END

SHEET: 6 OF 10 ITEM/PART NO: 000185992 / 33497201000 REV

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG 000228177 344479-01-000

8

7

6

5

4

3

2

1

4

1

2


3

4

3

2

1

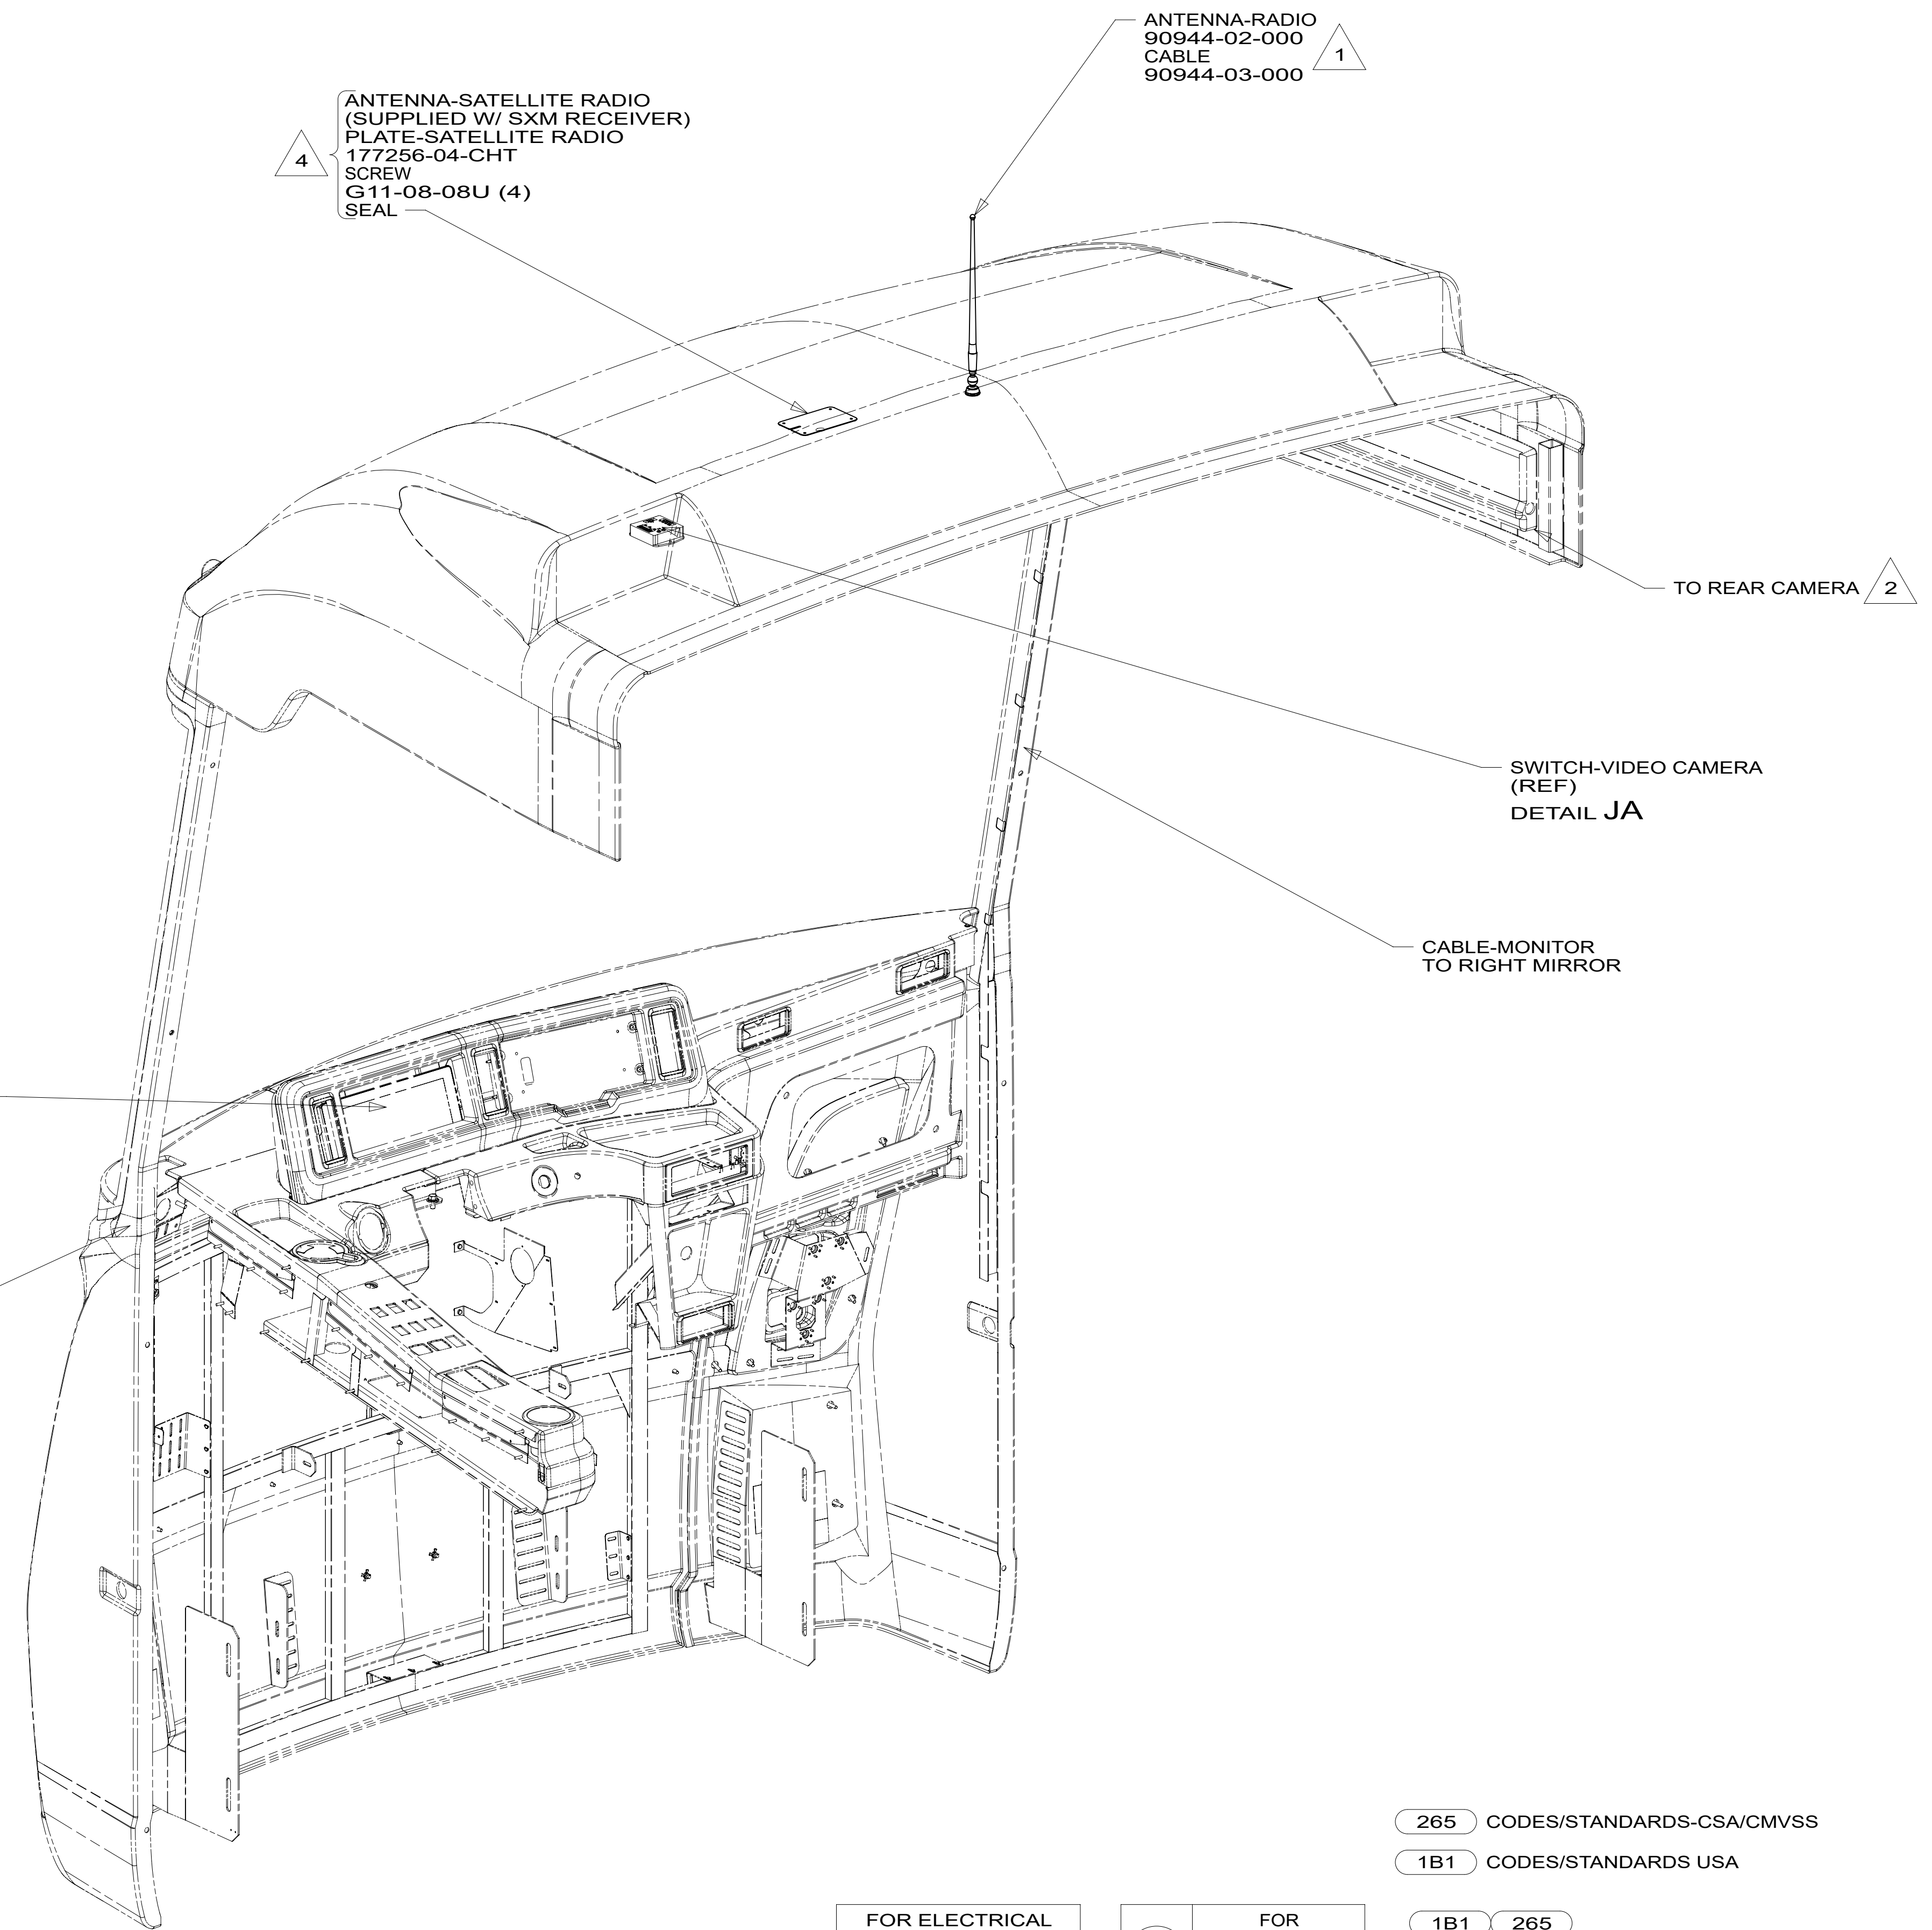

4 MOUNT ANTENNA SUCH THAT BASE IS SQUARE W/ REAR OF ROOF CAP AND HOLE IS DIRECTLY OVER HOLE IN FIBERGLASS. SEAL HOLE IN ROOF CAP, BASE AT SCREWS.

3 COMPONENT PROVIDED BY FREIGHTLINER.

2 RUN CABLE THRU RIGHT HAND COVE TO REAR OF UNIT.

1 SEAL AROUND ANTENNA BASE.

NOTES:

265 CODES/STANDARDS-CSA/CMVSS

1B1 CODES/STANDARDS USA

1B1 265

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

X-X FOR ELECTRICAL CALLOUTS SEE DWG 000228177 344479-01-000

DESCRIPTION: WIRING INSTL-FRONT END

SHEET: 7 OF 10 ITEM/PART NO.: 000185992 / 33497201000 REV

8

7

6

5



4

3

2

1 28-Mar-2024

8 7 6 5 4 3 2 1

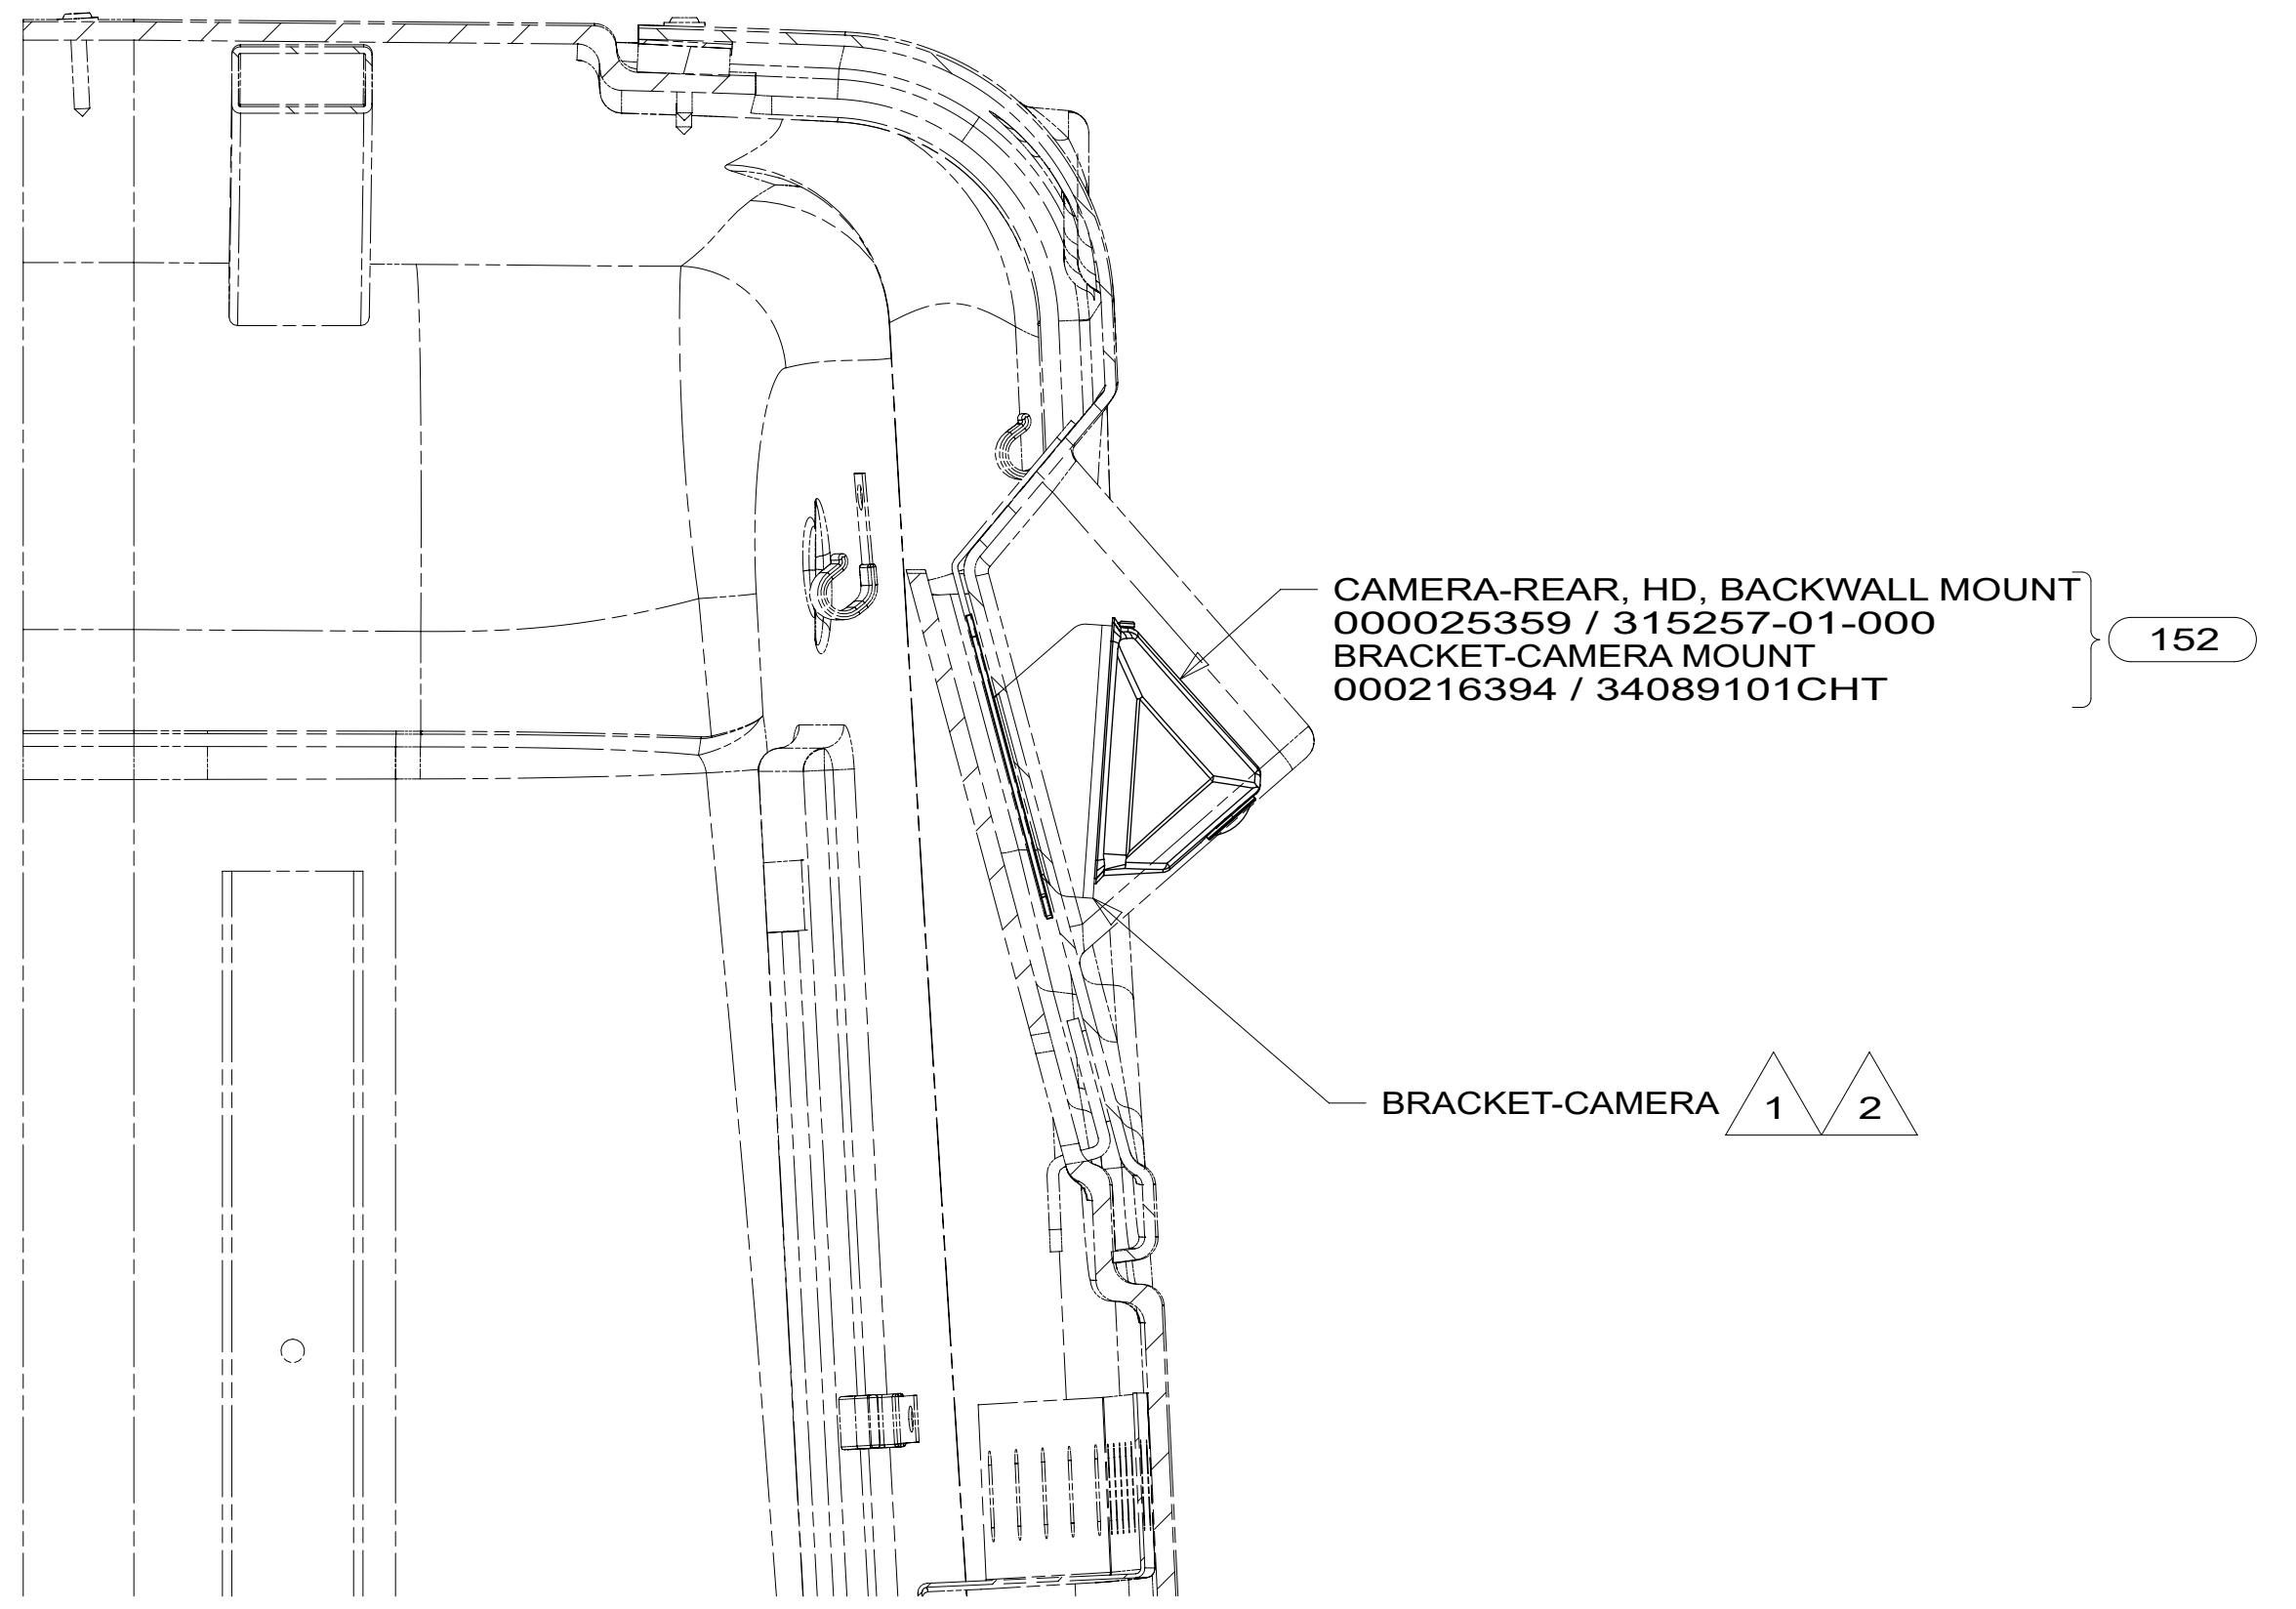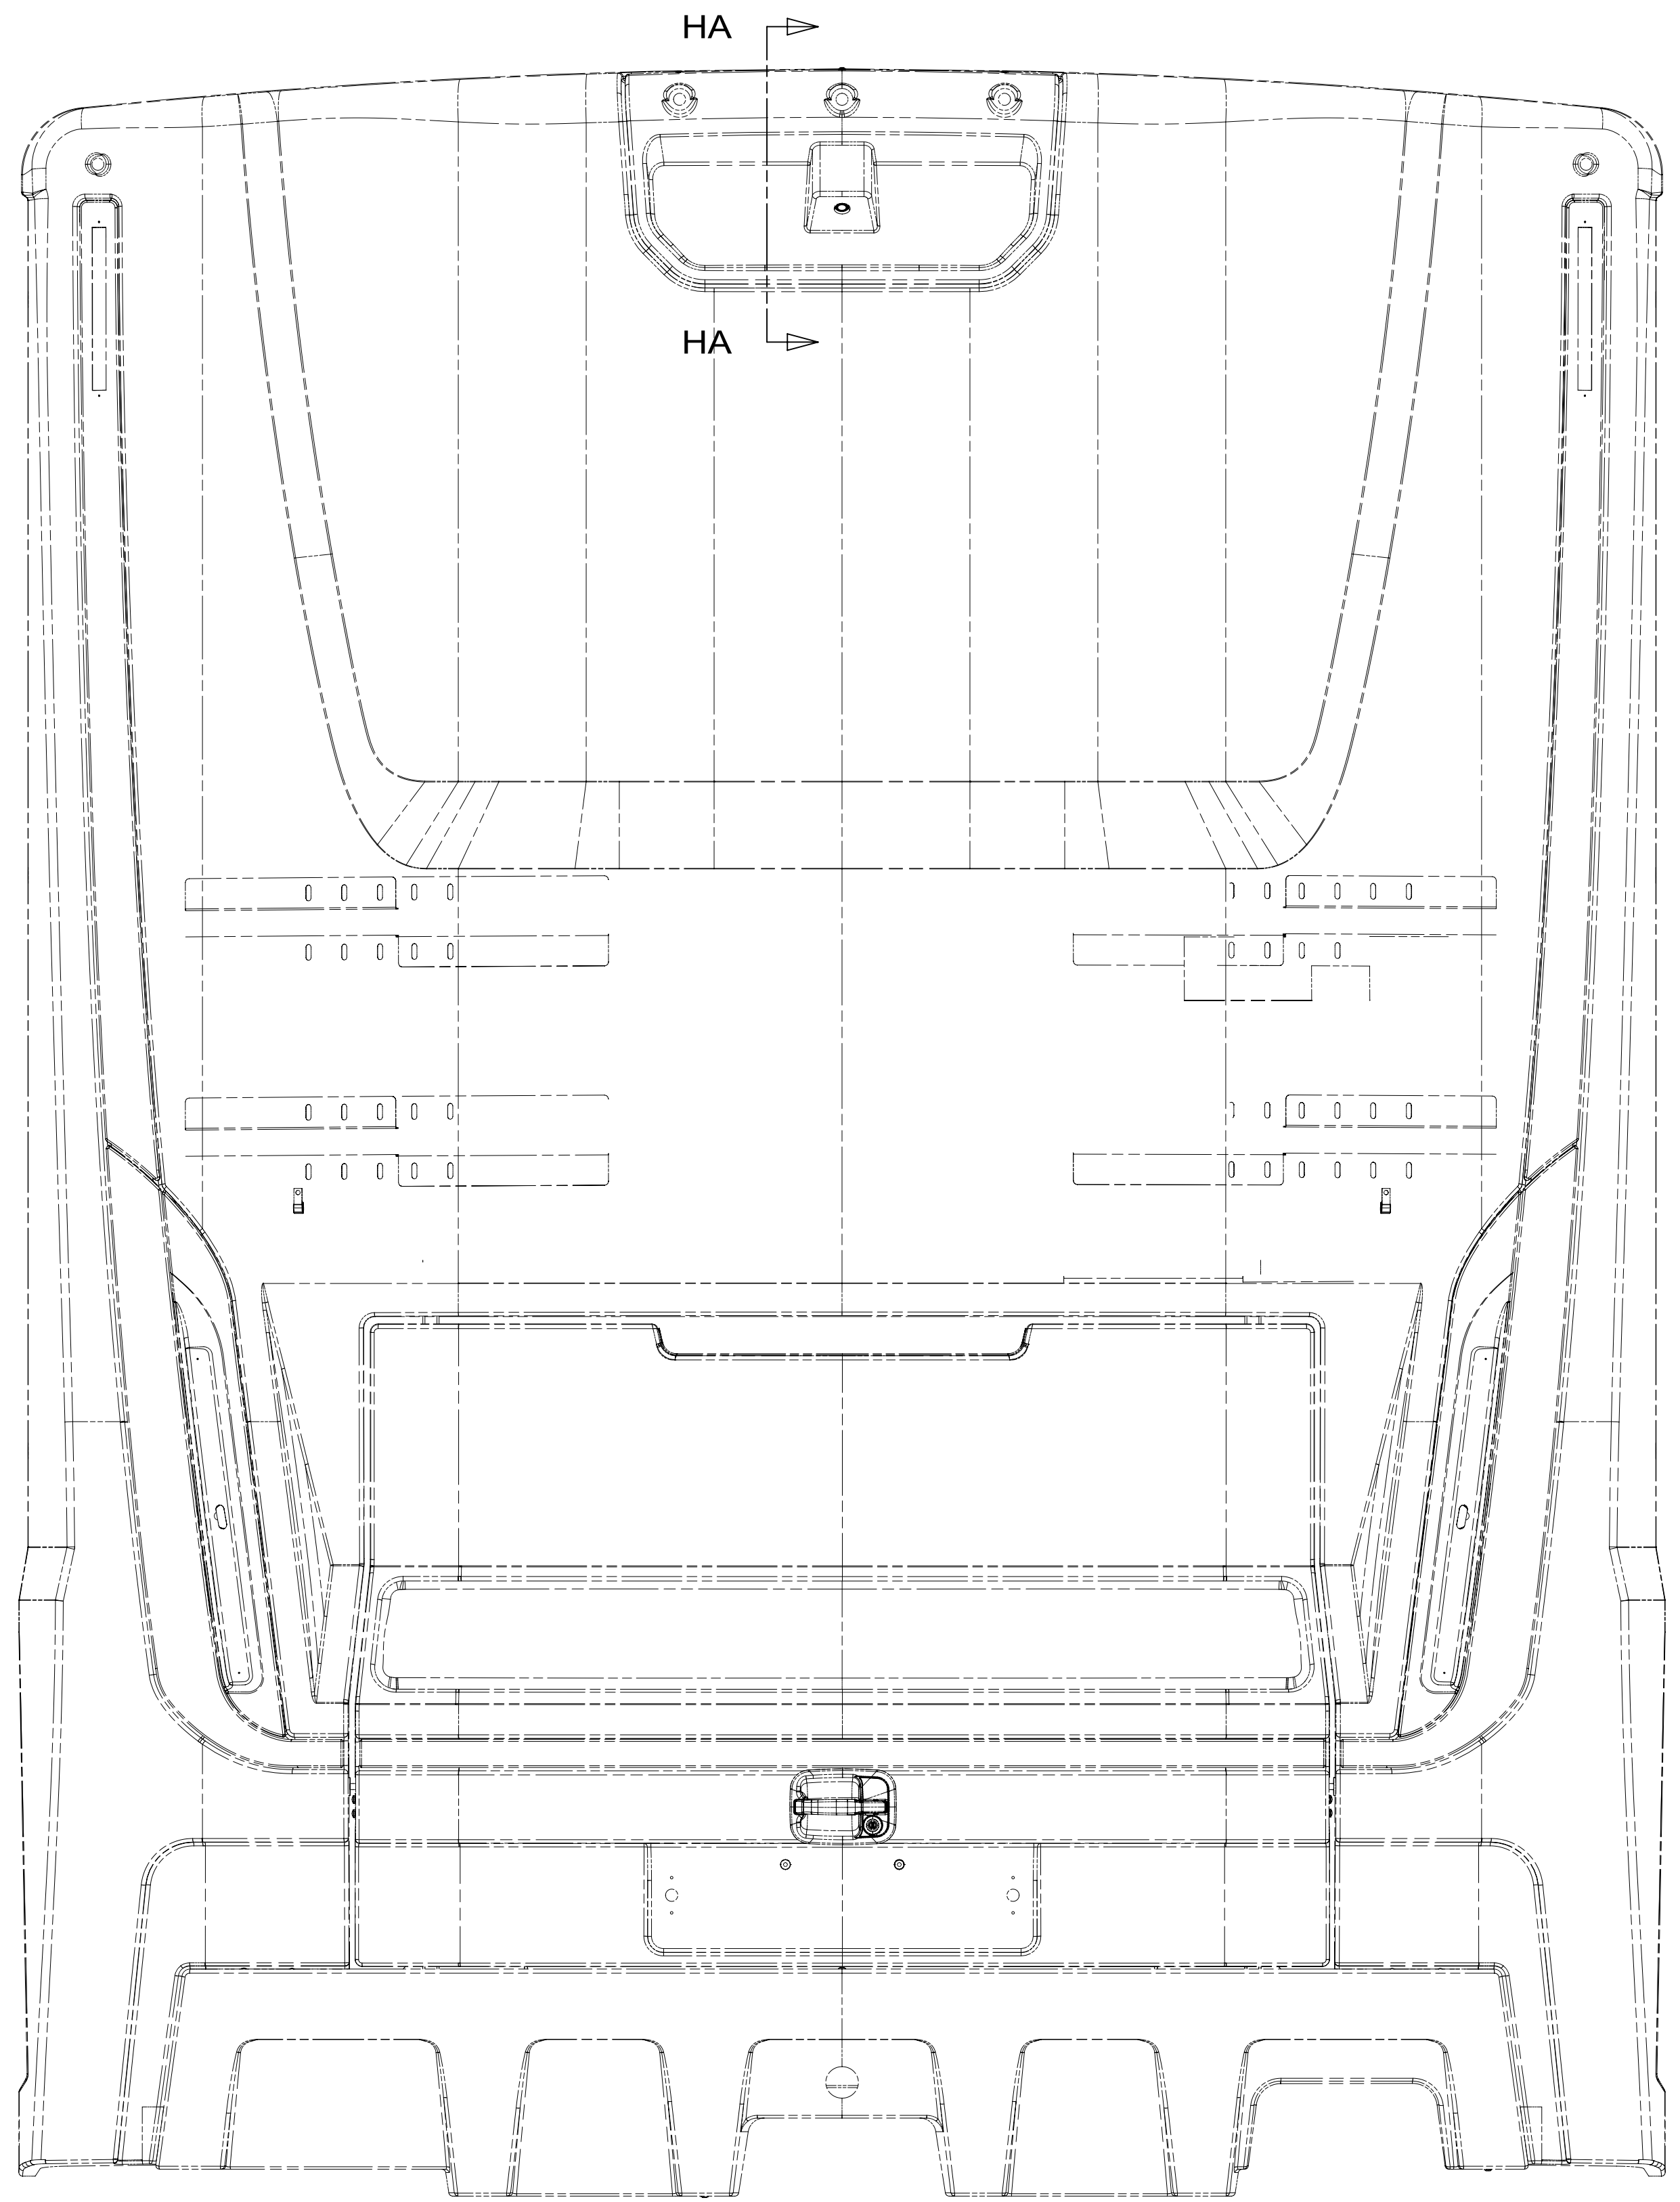

SECTION HA-HA

- 2 ALIGN CAMERA IN CENTER OF SHROUD OPENING AND ADJUST SO BACKWALL IS JUST VISIBLE.
- 1 PARTS SUPPLIED WITH REAR CAMERA.

NOTES:



- 152 LG SCREEN-INFOTAIN CTR/GPS
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG 000228177 344479-01-000

DESCRIPTION:	1B1 265	
WIRING INSTL-FRONT END		
SHEET:	ITEM/PART NO.:	REV
8 OF 10	000185992 / 33497201000	

8 7 6 5 4 3 2 1 28-Mar-2024

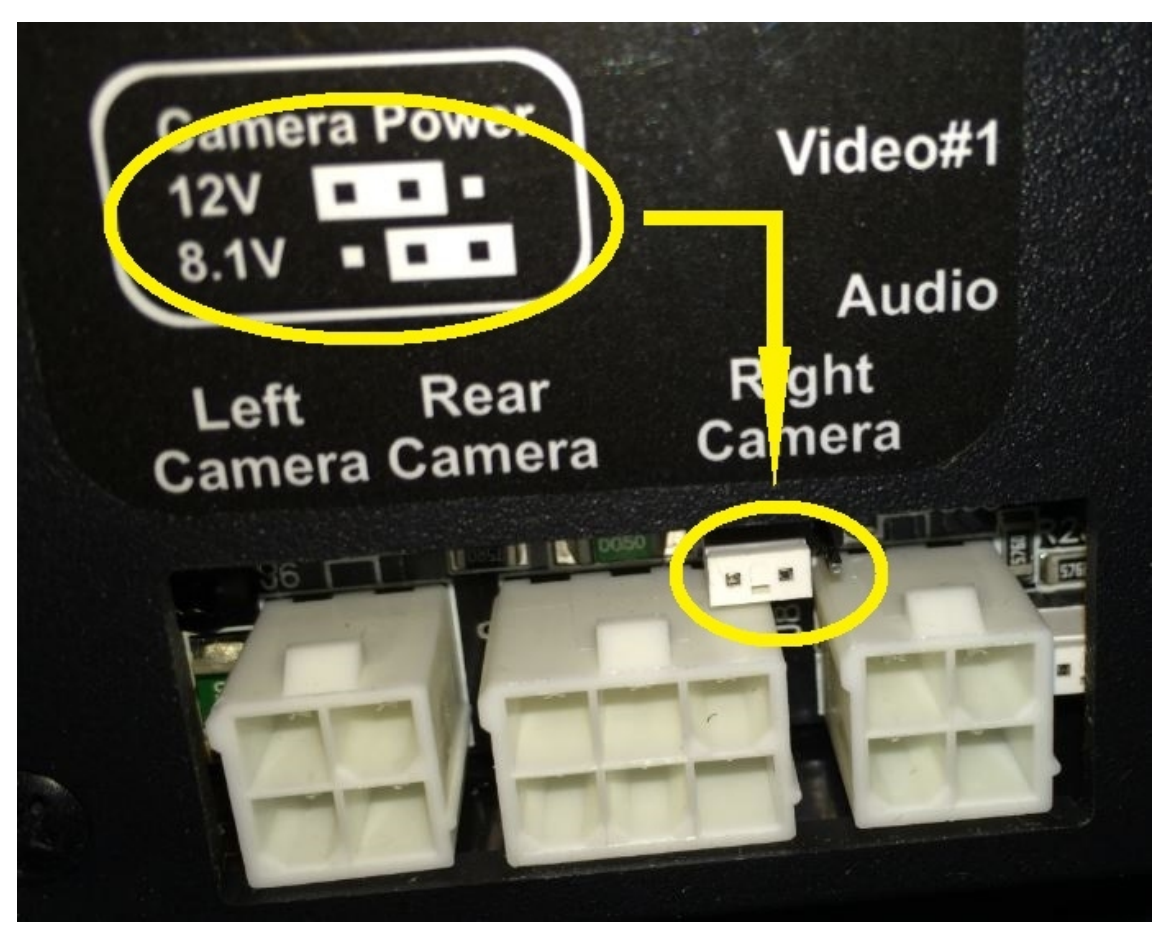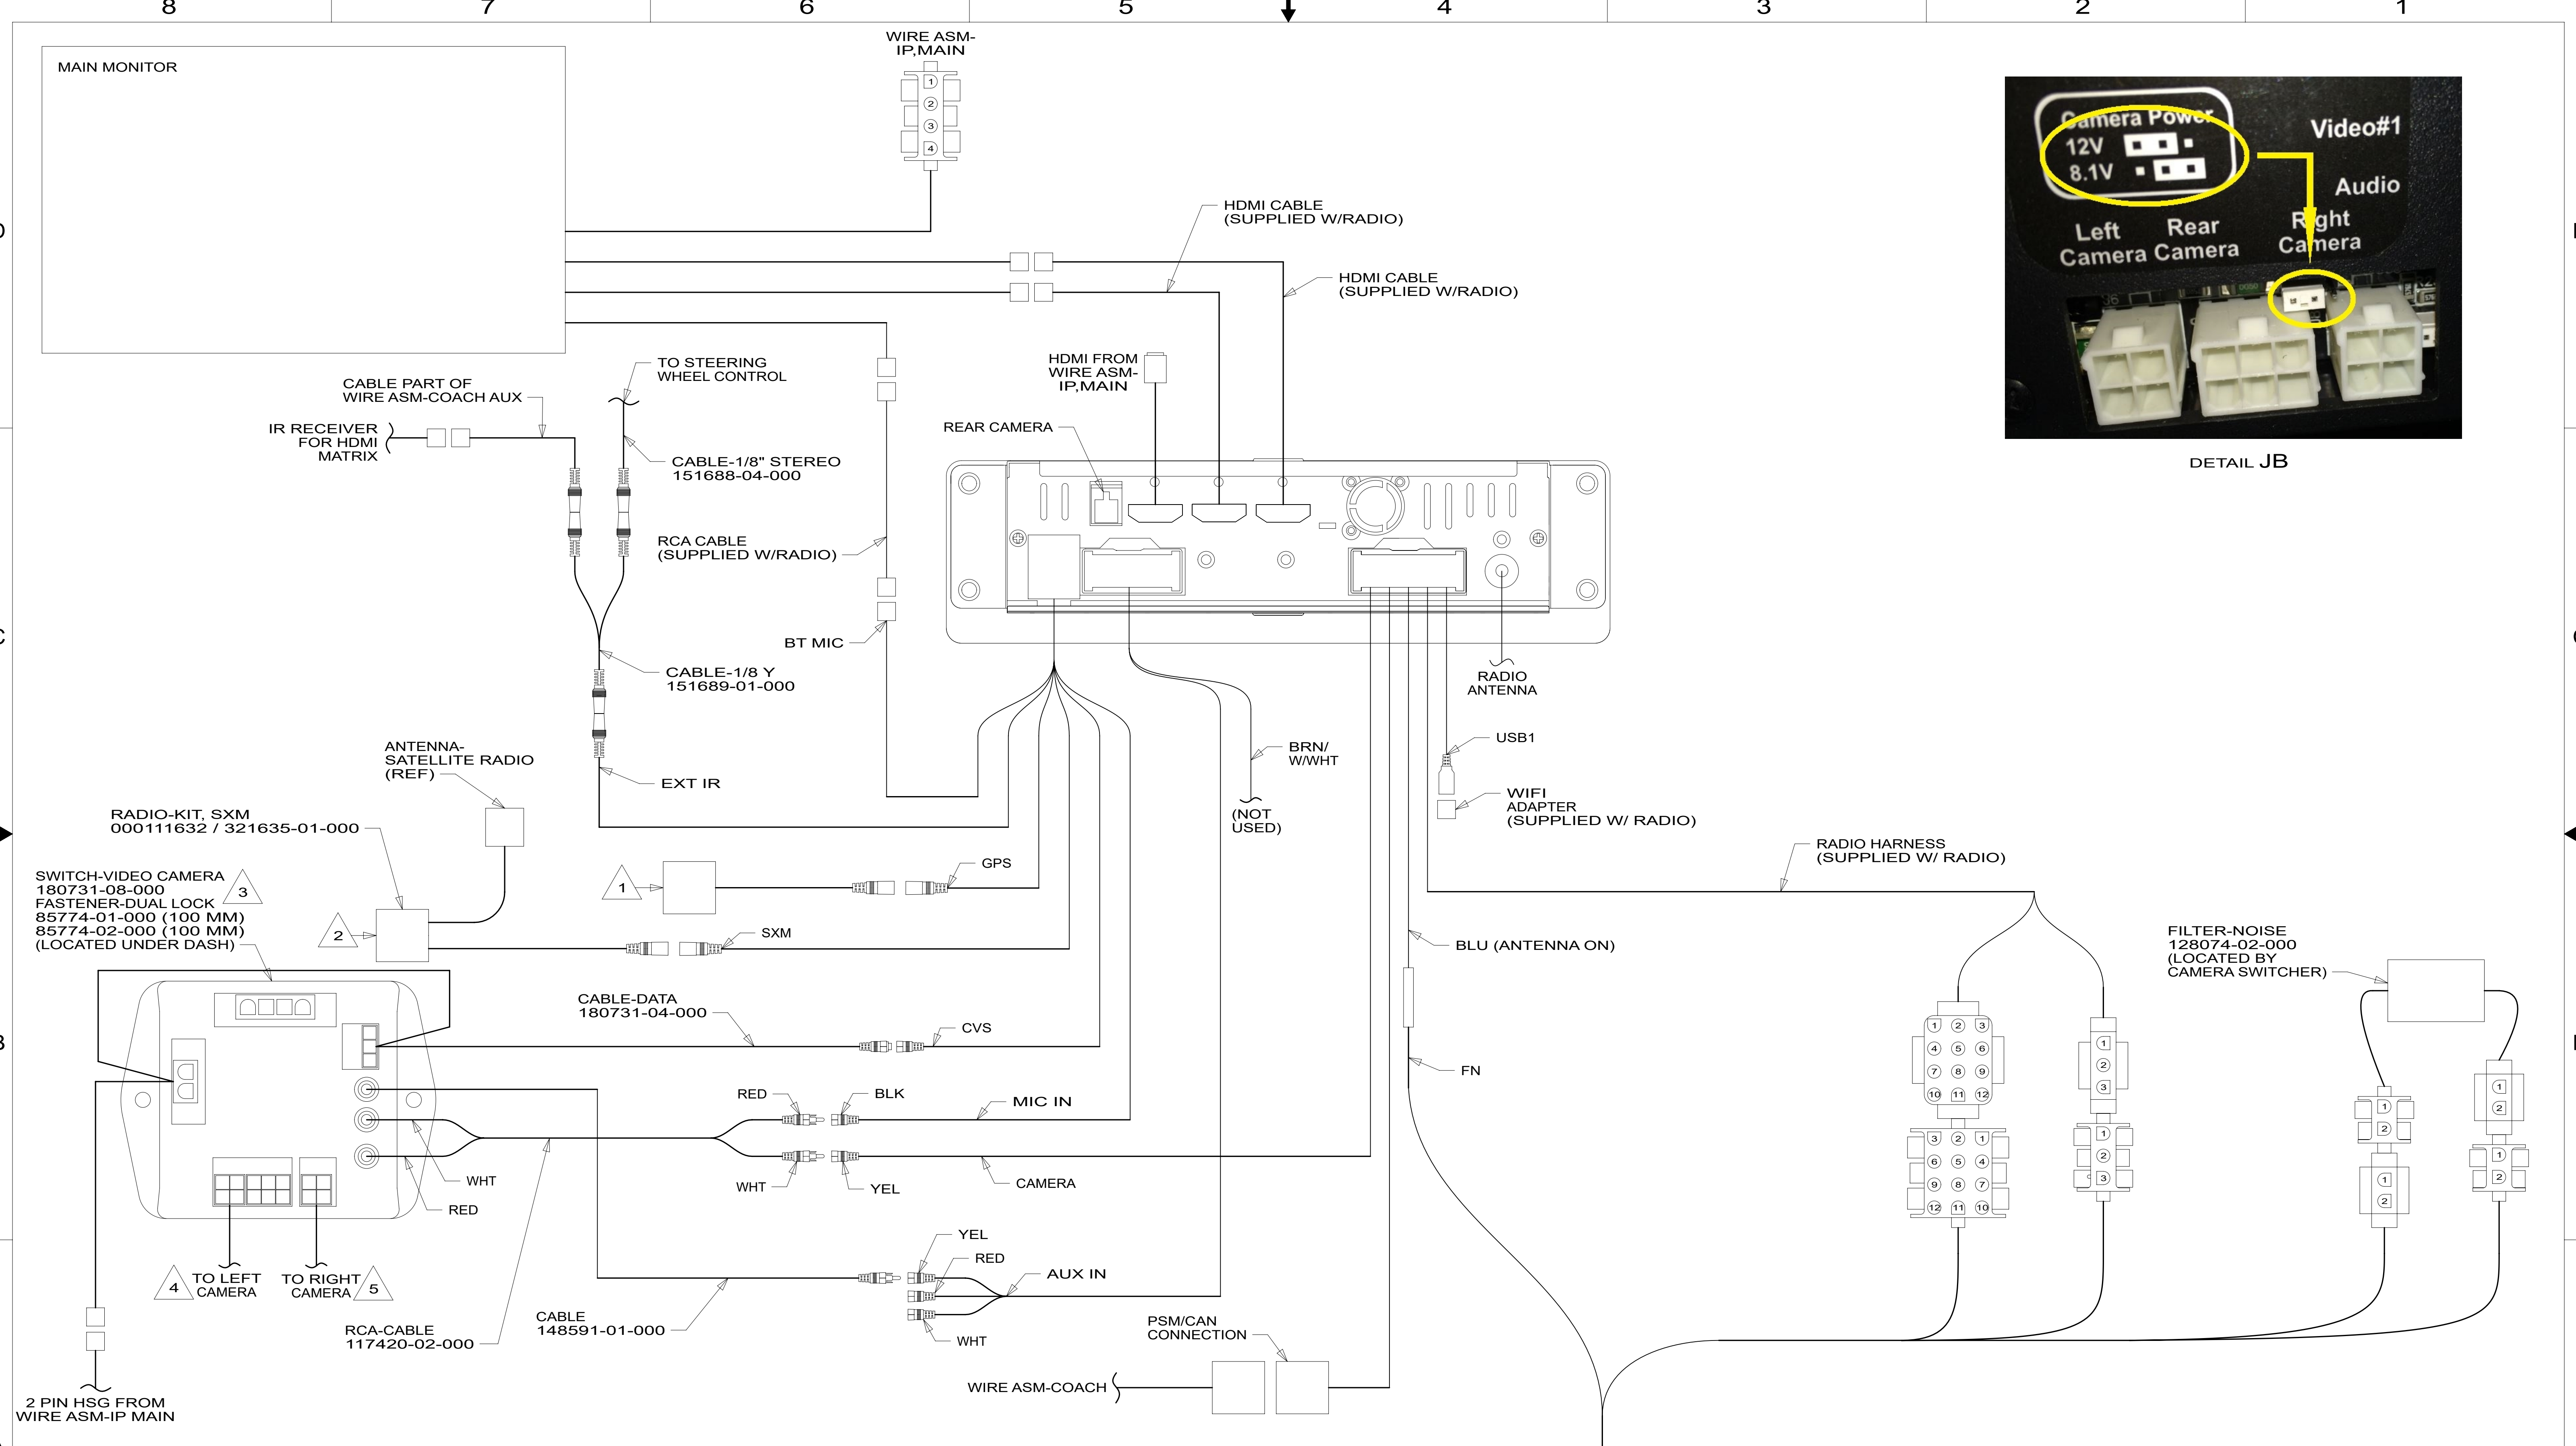

DETAIL JB

DETAIL JA

- NOTES:
- 3 ENSURE CAMERA POWER JUMPER IS IN 12 VOLT POSITION. MOVE TO 12 VOLT POSITION IF NECESSARY. SEE DEAL JB.
 - 2 WIRE TIE RECEIVER-SATELLITE RADIO AND SWITCH-VIDEO CAMERA TO DASH RADIO WIRING BEHIND THE RADIO.
 - 1 MOUNT ON TOP OF CABINET ABOVE RADIO.

- 6. APPLY TAPE 8363-01-000 AS NECESSARY TO SECURE NON-LOCKING CONNECTIONS.
- 5 MARK RIGHT CABLE WITH WHITE TAPE 900000-08-000 NEXT TO CONNECTOR.
- 4 MARK LEFT CABLE WITH YELLOW TAPE 900000-07-000 NEXT TO CONNECTOR.

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG 000228177 344479-01-000

265 CODES/STANDARDS-CSA/CMVSS
1B1 CODES/STANDARDS USA

DESCRIPTION:		1B1	265
WIRING INSTL-FRONT END			
SHEET:	ITEM/PART NO.:	REV	
9 of 10	000185992 / 33497201000		

8

7

6



5

4

3

2

1

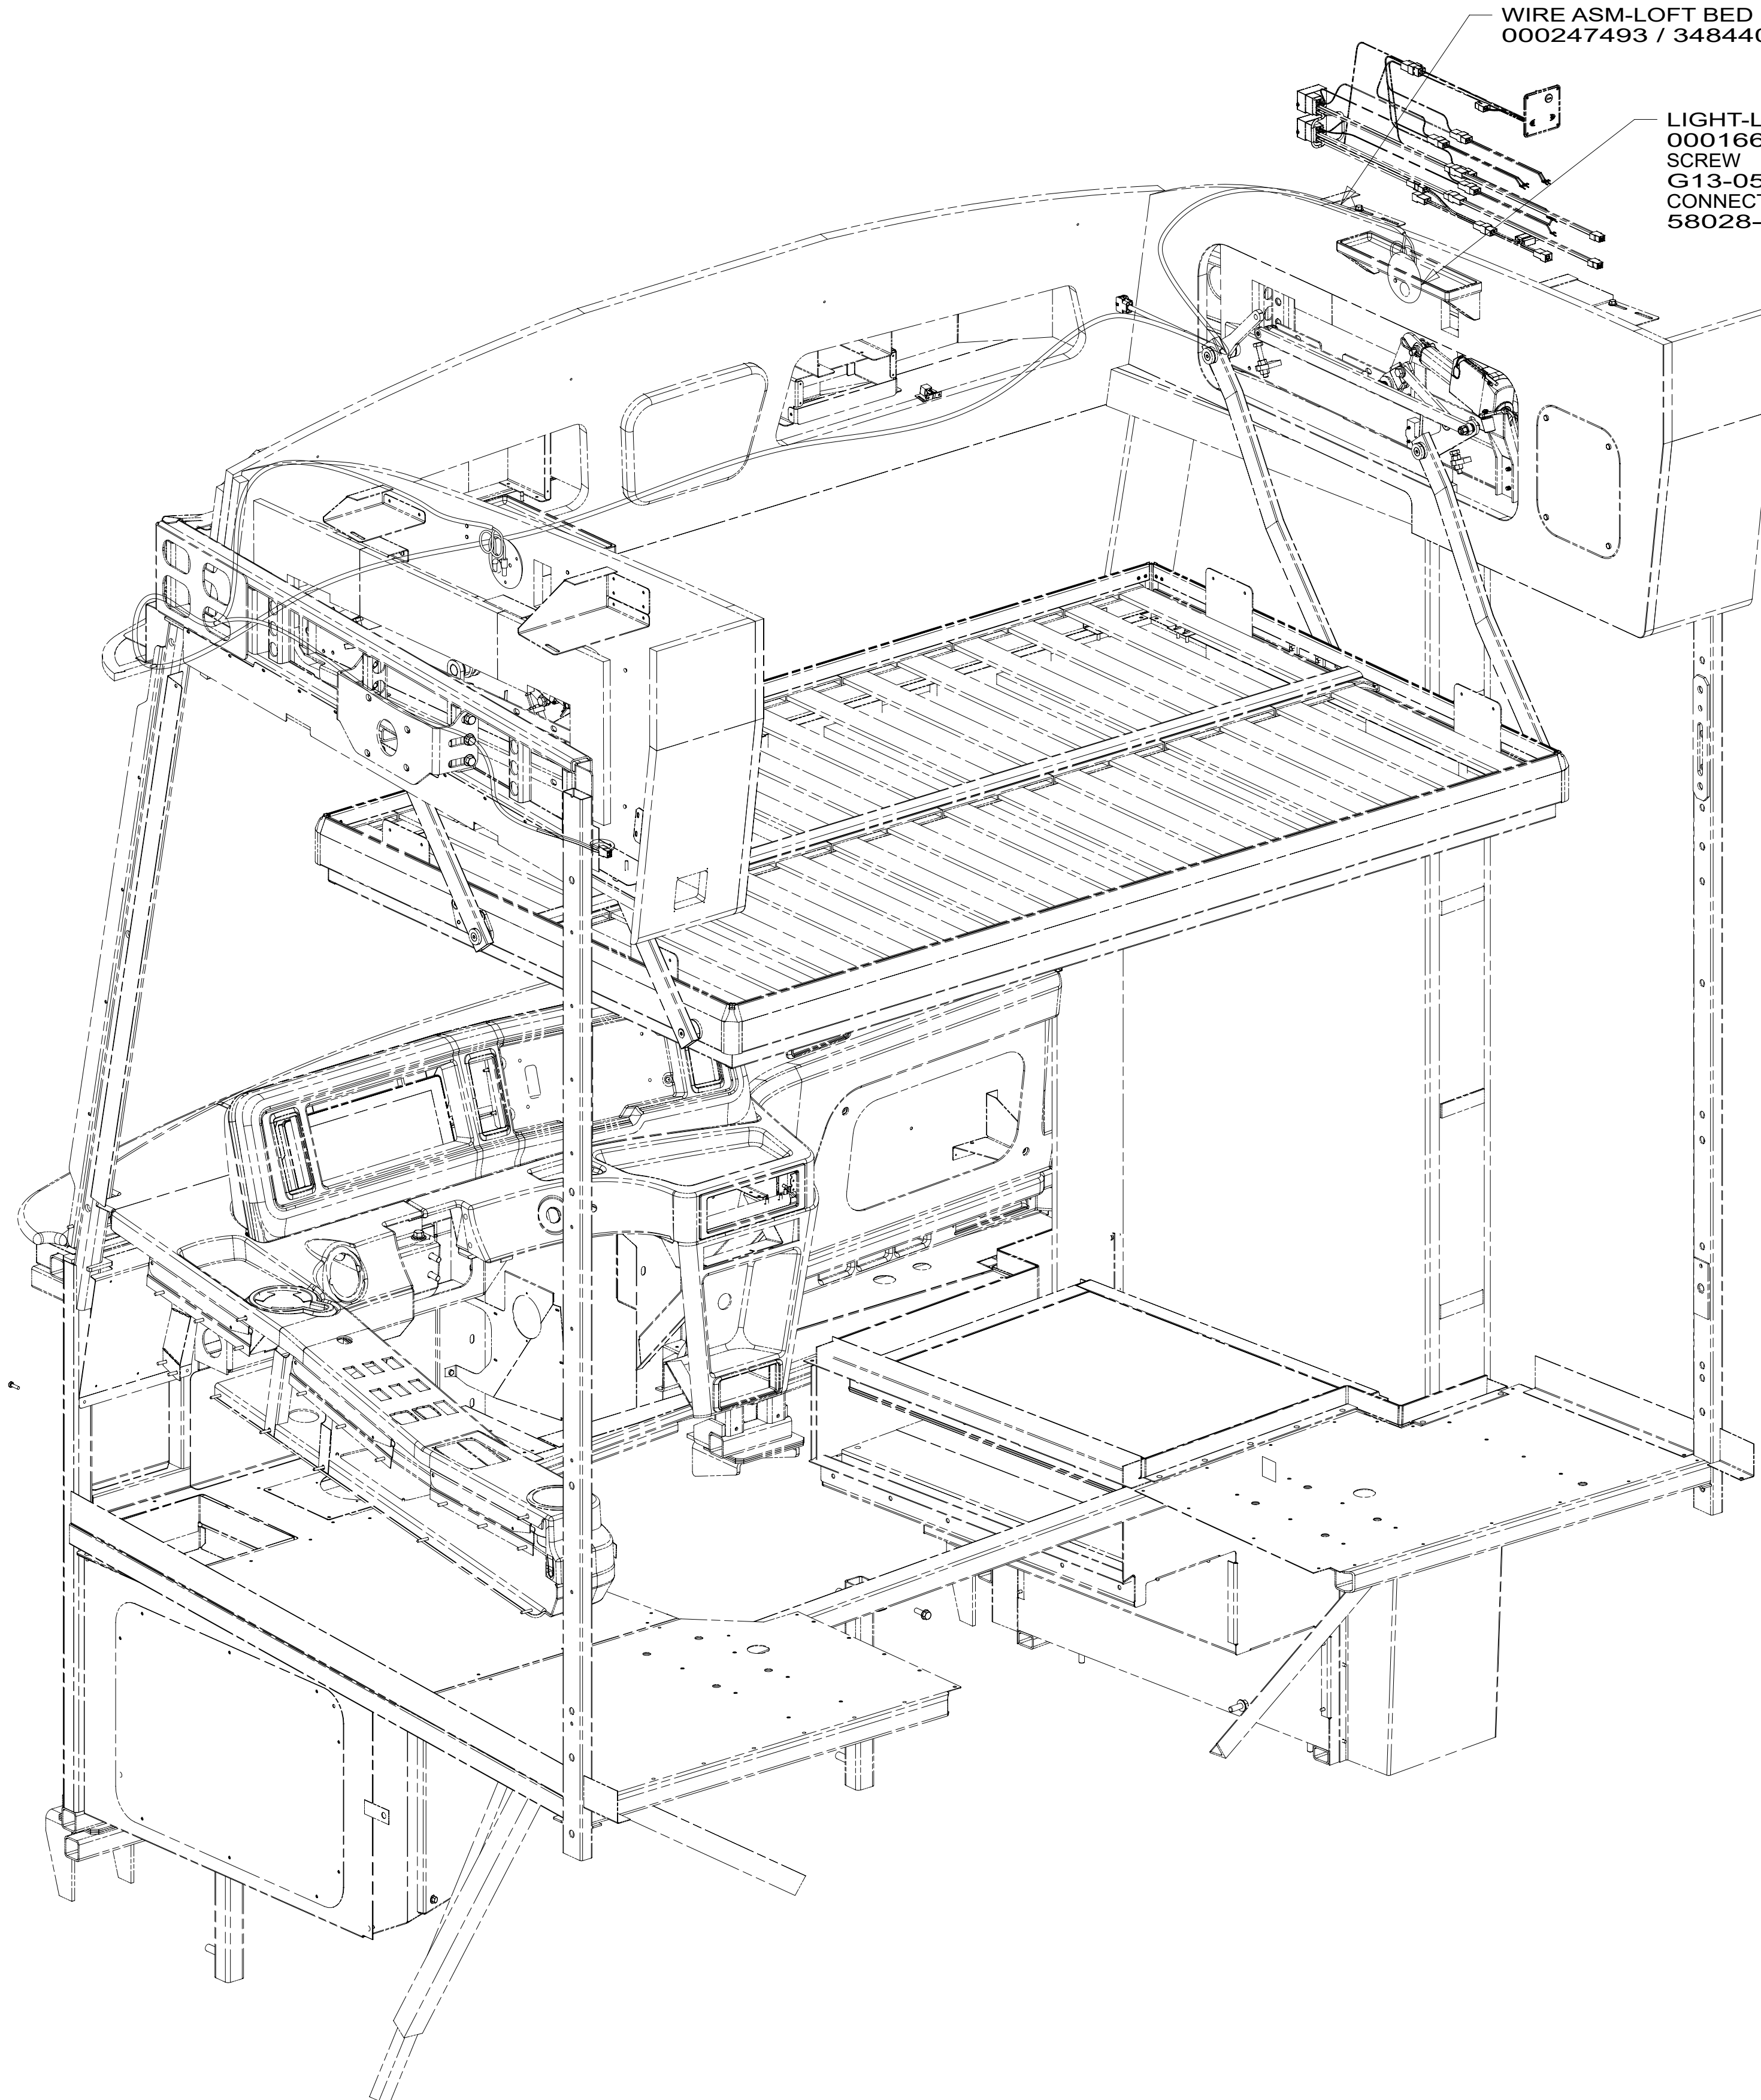

WIRE ASM-LOFT BED
000247493 / 348440-01-000

LIGHT-LED,ROUND W/SWITCH,3.5 PLASTIC
000166892 / 329927-01-CHT (2)
SCREW
G13-05-10U (6)
CONNECTOR
58028-01-000 (4)

D

D

C

C

B

B

A


A



- 45B LOFT BED
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG 000228177 344479-01-000



1B1 265 45B

DESCRIPTION: WIRING INSTL-FRONT END

SHEET: 10 OF 10 ITEM/PART NO.: 000185992 / 33497201000 REV

8

7

6

5

4

3

2

1



28-Mar-2024